

FORM PTO 1390  
(REV 5-93)

US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY DOCKET NUMBER  
177/526327TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. §371U.S. APPLICATION NO.  
(if known to the EPO)  
**097331763**International Application No.  
PCT/JP97/04873International Filing Date  
December 26, 1997Priority Date Claimed  
December 27, 1996

## Title of Invention

METHOD AND APPARATUS FOR MOUNTING ELECTRONIC COMPONENT ON CIRCUIT BOARD

Applicant(s) For DO/EO/US  
Kazuto NISHIDA

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. §371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. §371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. §371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. §371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. §371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau per PCT/308. **ATTACHMENT A**
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. §371(c)(2)). **ATTACHMENT B**
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. §371(c)(3)).
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☒ An oath or declaration of the inventor(s) (35 U.S.C. §371(c)(4)). **ATTACHMENT C**
9. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. §371(c)(5)).

## Items 10. to 13. below concern other document(s) or information included:

10. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
11. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included. **ATTACHMENT D**
12. ☒ A **FIRST** preliminary amendment. **ATTACHMENT E**
  - ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
13. ☐ Other items or information:

COPY, FINANCE DEPT., USPTO  
CHARGE REFERENCE  
TO DEPOSIT ACCT. # 23-0975THE COMMISSIONER IS AUTHORIZED  
TO CHARGE ANY DEFICIENCY IN THE  
FEE FOR THIS PAPER TO DEPOSIT  
ACCOUNT NO. 23-0975.

<b>U.S. APPLICATION NO.</b> (if known, see 37 CFR 1.5)		<b>INTERNATIONAL APPLICATION NO.</b> PCT/JP97/04873		<b>ATTORNEY'S DOCKET NO.</b> 177/526327	
17. [X] The following fees are submitted  <b>BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)):</b>  [X] Search Report has been prepared by the EPO or JPO..... \$ 840.00 [ ] Neither international preliminary examination fee (37 CFR 1.492) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO..... \$ 970.00  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				<b>CALCULATIONS</b>	<b>PTO USE ONLY</b>
Surcharge of \$130.00 for furnishing the oath or declaration later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				-	
Claims	Number Filed	Number Extra	Rate		
Total Claims	38 -20 =	18	X \$18.00	\$ 324.00	
Independent Claims	2 - 3 =	0	X \$78.00	--	
Multiple dependent claim(s) (if applicable)			+ \$260.00	--	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$1,164.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28)				--	
<b>SUBTOTAL =</b>				\$1,164.00	
Processing fee of \$130.00 for furnishing the English translation later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				+	--
<b>TOTAL NATIONAL FEE =</b>				\$1,164.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40 per property +				\$ 40.00	
<b>TOTAL FEES ENCLOSED =</b>				\$1,204.00	
				Amount to be refunded	\$
				Amount to be charged	\$
a. [X] A check in the amount of \$ <u>1,204.00</u> to cover the above fees is enclosed. A duplicate copy of this form is enclosed. b. [ ] Please charge my Deposit Account No. 23-0975 in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. [X] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>23-0975</u> . A duplicate copy of this form is enclosed.  <b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b>  <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">           SEND ALL CORRESPONDENCE TO:             WENDEROTH, LIND &amp; PONACK            2033 "K" St., N.W., Ste. 800            Washington, D.C. 20006         </div> <div style="width: 45%; text-align: center;">             SIGNATURE   <u>Jeffrey Nolt</u>            NAME   <u>25,408</u>            REGISTRATION NUMBER         </div> </div>					
June 25, 1999					

[CHECK NO. 33877]  
 [99-0756\*/JN/177]

510 Rec'd PCT/PTO 25 JUN 1999

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of :  
 Kazuto NISHIDA :  
 Serial No. [Not yet assigned] :  
 Filed June 25, 1999 : Attn: BOX PCT  
 Corresponding to PCT/JP97/04873 : Docket No. 177/526327  
 Filed December 26, 1997 :  
 METHOD AND APPARATUS FOR :  
 MOUNTING ELECTRONIC COMPONENT :  
 ON CIRCUIT BOARD :

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents,  
 Washington, D.C.

Sir:

Kindly amend the above-identified application as follows.

IN THE CLAIMS:

Claims 1-31, rewrite as follows:

1. (Amended) An electronic component mounting method comprising:

aligning in position electrodes [(5)] of a circuit board [(4)] with bumps [(3)] formed by wire-bonding on electrodes [(2)] of an electronic component [(1)] with interposition of an insulative thermosetting resin [(6, 6b)] that includes no conductive particle; and

hardening with heat the thermosetting resin interposed

ATTACHMENT E

between the electronic component and the circuit board while correcting warp of the board by pressurizing the electronic component against the circuit board with a pressure force of not smaller than 20 gf per bump, thereby bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

2. (Amended) An electronic component mounting method as claimed in claim 1, wherein

the positional alignment is executed by aligning in position the electrodes [(5)] of the circuit board [(4)] with the bumps [(3)] formed by wire-bonding on the electrodes [(2)] of the electronic component [(1)] with interposition of the thermosetting resin [(6, 6b)] without performing leveling, and the bonding is executed by hardening with the heat the thermosetting resin interposed between the electronic component and the circuit board while simultaneously performing leveling of the bumps and correction of the warp of the board by pressurizing the electronic component against the circuit board with the pressure force of not smaller than 20 gf per bump, thereby bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

3. (Amended) An electronic component mounting method as claimed in claim [1 or] 2, wherein

the thermosetting resin is a thermosetting resin sheet [(10)] having an anisotropic conductive film.

4. (Amended) An electronic component mounting method as claimed in claim 1, wherein

the positional alignment is executed after a solid thermosetting resin sheet [(6)] having a shape dimension smaller than an outside dimension [(OL)] of connection between the electrodes [(2)] of the electronic component [(1)] is stuck as the thermosetting resin to the circuit board [(4)] before the positional alignment, and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet [(6)], thereby bonding the electronic component and the circuit board together.

5. (Amended) An electronic component mounting method as claimed in claim 1, wherein

a conductive adhesive [(11)] is transferred onto the bumps [(3)] of the electrodes [(2)] of the electronic component [(1)] before the positional alignment,

the positional alignment of the bumps with the electrodes

[(5)] of the circuit board is executed after a solid thermosetting resin sheet [(6)] having a shape dimension smaller than an outside dimension of connection between the electrodes of the electronic component is stuck as the thermosetting resin to the circuit board [(4)] before the positional alignment, and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet [(6)], thereby bonding the electronic component and the circuit board together.

6. (Amended) An electronic component mounting method as claimed in claim 1, wherein

the positional alignment of the bumps [(3)] of the electrodes [(2)] of the electronic component [(1)] with the electrodes [(5)] of the circuit board is executed after a solid thermosetting resin sheet [(6)] whose one surface or both surfaces are provided with a flux layer [(12)] is stuck as the thermosetting resin to the circuit board [(4)], and

the bonding is executed by hardening the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component

against the circuit board by a heated head [(8)], thereby bonding the electronic component and the circuit board together as a consequence of the bonding of the bumps to the electrodes of the circuit board due to adhesion of a flux component of the flux layer to the bumps occurring when the bumps break through the resin sheet.

7. (Amended) An electronic component mounting method as claimed in claim 1, wherein

the positional alignment of the bumps of the electronic component with the electrodes of the circuit board is executed after a solid thermosetting resin sheet [(66)] where particles [(14)] comprised of: resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or gold balls are embedded in a direction in which the bumps and the electrodes of the circuit board are made mutually electrically continuous inside holes [(15)] formed in positions corresponding to either the bumps [(3)] of the electrodes [(2)] of the electronic component [(1)] or the electrodes [(5)] of the circuit board [(4)] before the positional alignment is stuck as the thermosetting resin to the electrode of the circuit board through positional alignment, and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while performing the correction of

the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet [(6)].

8. (Amended) An electronic component mounting method as claimed in claim 1, wherein

the positional alignment of the electrodes of the electronic component with the electrodes of the circuit board is executed after a solid thermosetting resin sheet [(66)] where particles [(16)] each of which has a size that is greater than a thickness [( $t_{pc}$ )] of a passivation film [(1a)] to be coated on at least the electrodes [(2)] of the electronic component and smaller than a thickness [( $t_{pcb}$ )] of one of the electrodes of the circuit board and each of which is comprised of: resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or gold balls are embedded inside holes [(15)] formed in positions corresponding to either the electrodes [(2)] of the electronic component or the electrodes [(5)] of the circuit board in a direction in which the particles [(16)] are interposed between the electrode of the electronic component and the circuit electrode of the circuit board and in which the electrodes are made mutually electrically continuous before the positional alignment is stuck as the thermosetting resin to the electrode of the circuit board through positional alignment when mounting the electronic component



[(1)] on the circuit board [(4)], and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet [(6)] and with ultrasonic vibrations applied to the electronic component.

9. (Amended) An electronic component mounting method as claimed in claim 3, wherein

the conductive particles included in the anisotropic conductive film [(10)] are nickel particles plated with gold.

10. (Amended) An electronic component mounting method as claimed in [any one of claims] claim 1 [through 9], wherein

the thermosetting resin is provided by the thermosetting resin sheet [(6)].

11. (Amended) An electronic component mounting method as claimed in claim 10, wherein

the thermosetting resin sheet [(6)] has a thickness greater than a gap between an active surface of the electronic component and a surface which belongs to the circuit board and on which the electrodes [(5)] thereof are formed after the bonding.

12. (Amended) An electronic component mounting method as claimed in claim [1 or] 2, wherein

the thermosetting resin is provided by the thermosetting adhesive [(6b)].

13. (Amended) An electronic component mounting apparatus comprising:

a positional alignment device for aligning in position electrodes [(5)] of a circuit board [(4)] with bumps [(3)] formed by wire-bonding on electrodes [(2)] of an electronic component [(1)] with interposition of an insulative thermosetting resin [(6, 6b)] that includes no conductive particle;

a heating device [(8a)] for heating the thermosetting resin [(6, 6b)]; and

a bonding device for hardening with heat the electronic thermosetting resin interposed between the electronic component and the circuit board while correcting warp of the board by pressurizing the electronic component against the circuit board with a pressure force of not smaller than 20 gf per bump with the heat applied to the thermosetting resin [(6, 6b)] from the heating device, thereby bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

14. (Amended) An electronic component mounting apparatus

as claimed in claim 13, wherein

the positional alignment device is to align in position the electrodes [(5)] of the circuit board [(4)] with the bumps [(3)] formed by wire-bonding on the electrodes [(2)] of the electronic component [(1)] with interposition of the thermosetting resin [(6, 6b)] without performing leveling, and the bonding device hardens with the heat the thermosetting resin interposed between the electronic while simultaneously performing leveling of the bumps and correction of the warp of the board by pressurizing the electronic component against the circuit board with the pressure force of not smaller than 20 gf per bump with the heat applied to the thermosetting resin [(6, 6b)] from the heating device, thereby bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

15. (Amended) An electronic component mounting apparatus as claimed in claim [13 or] 14, wherein

the thermosetting resin is a thermosetting resin sheet [(10)] having an anisotropic conductive film.

16. (Amended) An electronic component mounting apparatus as claimed in claim 13, wherein

the positional alignment device sticks a solid thermosetting resin sheet [(6)] having a shape dimension smaller than an outside dimension [(OL)] of connection between the

electrodes [(2)] of the electronic component [(1)] as the thermosetting resin to the circuit board [(4)], and thereafter executes positional alignment of the bumps [(3)] of the electrodes of the electronic component with the electrodes [(5)] of the circuit board, and

the bonding device hardens with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet [(6)], thereby bonding the electronic component and the circuit board together.

17. (Amended) An electronic component mounting apparatus as claimed in claim 13, wherein

a conductive adhesive [(11)] is transferred onto the bumps [(3)] of the electrodes [(2)] of the electronic component [(1)] before the positional alignment,

the positional alignment of the bumps with the electrodes [(5)] of the circuit board is executed after a solid thermosetting resin sheet [(6)] having a shape dimension smaller than an outside dimension of connection between the electrodes of the electronic component is stuck as the thermosetting resin to the circuit board [(4)] before the positional alignment, and

the bonding is executed by hardening with the heat the

thermosetting resin sheet interposed between the board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet [(6)], thereby bonding the electronic component and the circuit board together.

18. (Amended) An electronic component mounting apparatus as claimed in claim 13, wherein

the positional alignment device sticks a solid thermosetting resin sheet [(6)] whose one surface or both surfaces are provided with a flux layer [(12)] as the thermosetting resin to the circuit board [(4)], and thereafter executes the positional alignment of the bumps [(3)] of the electrodes [(2)] of the electronic component [(1)] with the electrodes [(5)] of the circuit board, and

the positional alignment hardens the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board by a heated head [(8)], thereby bonding the electronic component and the circuit board together as a consequence of the bonding of the bumps to the electrodes of the circuit board due to adhesion of a flux component of the flux layer to the bumps occurring when the bumps break through the resin

sheet.

19. (Amended) An electronic component mounting apparatus as claimed in claim 13, wherein

the positional alignment device sticks a solid thermosetting resin sheet [(66)] where particles [(14)] comprised of: resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or gold balls are embedded in a direction in which the bumps and the electrodes of the circuit board are made mutually electrically continuous inside holes [(15)] formed in positions corresponding to either the bumps [(3)] of the electrodes [(2)] of the electronic component [(1)] or the electrodes [(5)] of the circuit board [(4)], to the electrodes of the circuit board through positional alignment as the thermosetting resin, and thereafter executes the positional alignment of the bumps of the electronic component with the electrodes of the circuit board, and

the bonding device hardens with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet [(6)] so as to achieve the bonding.

20. (Amended) An electronic component mounting apparatus as claimed in claim 13, wherein

the positional alignment device sticks a solid thermosetting resin sheet [(66)] where particles [(16)] each of which has a size that is greater than a thickness [(t<sub>pc</sub>)] of a passivation film [(1a)] to be coated on at least the electrodes [(2)] of the electronic component and smaller than a thickness [(t<sub>pcb</sub>)] of one of the electrodes of the circuit board and are comprised of: resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or gold balls are embedded inside holes [(15)] formed in positions corresponding to either the electrodes [(2)] of the electronic component or the electrodes [(5)] of the circuit board in a direction in which the particles [(16)] are interposed between the electrodes of the electronic component and the circuit electrodes of the circuit board and in which the electrodes are made mutually electrically continuous, to the electrodes of the circuit board through positional alignment as the thermosetting resin when mounting the electronic component [(1)] on the circuit board [(4)], and thereafter executes the positional alignment of the electrodes of the electronic component with the electrodes of the circuit board, and

the bonding device hardens with the heat the thermosetting resin sheet interposed between the electronic

component and the circuit board while pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet [(6)] and with ultrasonic vibrations applied to the electronic component so as to achieve the bonding.

21. (Amended) An electronic component mounting apparatus as claimed in claim 15, wherein

the conductive particles included in the anisotropic conductive film [(10)] are nickel particles plated with gold.

22. (Amended) An electronic component mounting apparatus as claimed in [any one of claims] claim 13 [through 21], wherein the thermosetting resin is provided by the thermosetting resin sheet [(6)].

23. (Amended) An electronic component mounting apparatus as claimed in claim 22, wherein

the thermosetting resin sheet [(6)] has a thickness greater than a gap between an active surface of the electronic component and a surface which belongs to the circuit board and on which the electrodes [(5)] are formed after the bonding.

24. (Amended) An electronic component mounting apparatus as claimed in claim [13 or] 14, wherein

the thermosetting resin is provided by the thermosetting



adhesive [(6b)].

25. (Amended) An electronic component mounting apparatus as claimed in [any one of claims 12 through] claim 14, wherein the positional alignment device and the bonding device are constructed of one device.

26. (Amended) An electronic component mounting method as claimed in [any one of claims] claim 1 [through 12], wherein

a conductive paste [(100)] is applied to the bumps after the positional alignment and before the bonding, and thereafter the conductive paste is hardened to function as part of the bump, making the hardened conductive paste break through the thermosetting resin during the bonding for the electrical connection between the conductive paste and the electrode of the circuit board.

27. (Amended) An electronic component mounting apparatus as claimed in [any one of claims] claim 13 [through 25], wherein

a conductive paste [(100)] is applied to the bumps after the positional alignment and before the bonding, and thereafter the conductive paste is hardened to function as part of the bump, making the hardened conductive paste break through the thermosetting resin during the bonding for the electrical connection between the conductive paste and the electrode of the

circuit board.

28. (Amended) An electronic component mounting method as claimed in [any one of claims] claim 1 [through 9 or 11], wherein the thermosetting resin sheet is arranged on a side of the circuit board.

29. (Amended) An electronic component mounting method as claimed in [any one of claims] claim 1 [through 9 or 11], wherein the thermosetting resin sheet is arranged on a side of the electronic component.

30. (Amended) An electronic component mounting apparatus as claimed in [any one of claims] claim 13 [through 21 or 23], wherein the thermosetting resin sheet is arranged on side of the circuit board.

31. (Amended) An electronic component mounting apparatus as claimed in [any one of claims] claim [13 through 21 or 23], wherein the thermosetting resin sheet is arranged on a side of the electronic component.

Add the following new claims:

--32. An electronic component mounting method as claimed in claim 1, wherein

the thermosetting resin is a thermosetting resin sheet having an anisotropic conductive film.

33. An electronic component mounting method as claimed in claim 32, wherein

the conductive particles included in the anisotropic conductive film are nickel particles plated with gold.

34. An electronic component mounting method as claimed in claim 1, wherein

the thermosetting resin is provided by the thermosetting adhesive.

35. An electronic component mounting apparatus as claimed in claim 13, wherein

the thermosetting resin is a thermosetting resin sheet having an anisotropic conductive film.

36. An electronic component mounting apparatus as claimed in claim 35, wherein

the conductive particles included in the anisotropic conductive film are nickel particles plates with gold.

37. An electronic component mounting apparatus as claimed in claim 13, wherein

the thermosetting resin is provided by the thermosetting adhesive.

38. An electronic component mounting apparatus as claimed in claim 13, wherein

the positional alignment device and the bonding device are constructed of one device.--.

R E M A R K S

The present Preliminary Amendment is submitted to delete the multiple dependency of various of the claims thereby reducing the PTO filing fee.

Respectfully submitted,

Kazuto NISHIDA

By



Jeffrey Nolton  
Registration No. 25,408  
Attorney for Applicant

JN/pjm  
Washington, D.C.  
Telephone (202) 721-8200  
June 25, 1999

## DESCRIPTION

METHOD AND APPARATUS FOR MOUNTING  
ELECTRONIC COMPONENT ON CIRCUIT BOARD

## 5 Technical Field

10 The present invention relates to a method and apparatus for mounting an electronic component on a circuit board, i.e. for mounting an electronic component such as an IC chip and a surface acoustic wave (SAW) device singly (in the form of a bare IC in the case of the IC chip) on a printed circuit board to be used for an electronic circuit.

## Background Art

15 Nowadays, electronic circuit boards are employed in a variety of products, and they are improving in performance day by day. The frequencies to be used on the circuit boards are also increasing, and accordingly, the flip-chip mounting that ensures low impedance is the appropriate mounting method suitable for electronic devices that use high frequencies. In accordance with an increase  
20 in number of portable devices, the flip-chip mounting for mounting IC chips in the bare chip form, not in the package form, on a circuit board is needed. For this reason, the IC chips that are singly mounted on circuit boards and IC chips mounted on electronic devices and flat panel display units  
25 include a certain number of defectives. Besides the above-

mentioned flip-chip components, an increasing number of components of CSP (Chip Size Package), BGA (Ball Grid Array), and the like have come to be used.

As a conventional method (first prior art example) for bonding an IC chip to the circuit board of an electronic device, there is the one disclosed in the Japanese Examined Patent Publication No. 06-66355 and so on. This is shown in Fig. 13. As shown in Fig. 13, there is generally known the method for transferring Ag paste 74 onto bumps 73 formed on an IC chip 71, connecting the Ag paste 74 to electrodes 75 of a circuit board 76, thereafter hardening the Ag paste 74 and then pouring an encapsulation material 78 in a space between the IC chip 71 and the circuit board 76.

As a method (second prior art example) for bonding an IC chip to a liquid crystal display, there is generally known the semiconductor chip connecting structure that uses an anisotropic conductive film 80 as disclosed in the Japanese Examined Patent Publication No. 62-6652 shown in Figs. 14. In the structure, an anisotropic conductive adhesive layer 81 constructed by incorporating conductive particles 82 into an insulative resin 83 is peeled off a separator 85 and coated on a substrate or a glass plate of a liquid crystal display 84. By thermocompression bonding the IC chip 86, the anisotropic conductive adhesive layer 81 is interposed between the lower surface of the IC chip 86 and

the substrate 84 except for the portions below Au bumps 87.

As a third prior art example, there is known the method for coating a UV hardening resin on a substrate, mounting an IC chip on the substrate and applying ultraviolet rays to the resin with pressure, thereby hardening the resin between the IC chip and the substrate and maintaining contact between the two by the shrinkage force of the resin.

As described above, the bonding of an IC chip has been performed by die-bonding an IC chip such as a flat package onto a lead frame, connecting the electrodes of the IC chip to the lead frame by wire-bonding, forming a package by resin molding, thereafter printing solder paste on a circuit board, mounting the flat package IC on the board, and performing reflow of the paste. According to the above processing method called SMT (Surface Mount Technology), it has been difficult to reduce the circuit board size due to a long process and much time consumed for the production. For example, an IC chip occupies an area about four times that of the IC chip when encapsulated in a flat package, and this has been a factor for hindering the reduction in size.

In contrast to this, the flip chip processing method of directly mounting an IC chip in the bare chip form has come to be more frequently used lately for the achievement of a reduction of process and a small-size

light-weight structure. This flip chip processing method has been developed with many forms such as stud bump bonding (SBB) for executing bump formation on an IC chip, bump leveling, Ag-Pd paste transfer, mounting, inspection, encapsulation with encapsulation resin, and inspection and UV resin bonding for simultaneously executing bump formation on an IC chip and UV hardening resin coating on the board and thereafter executing mounting, UV hardening of the resin, and inspection.

However, each of the methods has had the drawback that much time is taken for the hardening of the paste for connecting the bumps of the IC chip with the electrodes of the board and for the coating and hardening of the encapsulation resin, leading to degraded productivity. It is further required to use ceramic or glass for the circuit board, and this has disadvantageously led to a high cost. According to the method for using conductive paste as in the first prior art example as a bonding material, the bumps of the IC chip have been required to be subjected to leveling so as to be flattened before use, in order to stabilize the transfer mount.

For the bonding structure using the anisotropic conductive adhesive as in the second prior art example, a structure that uses glass as a base material of the circuit board is developed. However, it is difficult to uniformly



disperse the conductive particles in the conductive adhesive, and this has caused shortcircuit due to abnormal dispersion of the particles and led to the expensiveness of the conductive adhesive.

5           The bonding method using the UV hardening resin as in the third prior art example has had the problem that the variation in height of the bumps must be suppressed within  $\pm 1$  ( $\mu\text{m}$ ) and the issue that the method cannot achieve connection to a board having a degraded flatness such as a  
10 resin board (glass epoxy board). The method using solder has been required to pour and harden the encapsulation resin for alleviating the difference between thermal expansion and contraction of the board and the IC chip after the bonding. This resin encapsulation needs two to four hours, and this  
15 has led to the issue that the productivity is significantly low.

In view of the aforementioned conventional issues, the present invention has an object to provide a method and apparatus for mounting an IC chip on a circuit board,  
20 intended for bonding the IC chip to the board with high productivity and high reliability necessitating neither the resin encapsulation process for pouring resin in the space between the IC chip and the board after the bonding of the IC chip to the circuit board nor the bump leveling process  
25 for adjusting the bump height constant.

Also, in view of the aforementioned conventional issues, the present invention has another object to provide a method and apparatus for mounting an electronic component on a circuit board, intended for directly bonding the electronic component on the circuit board with high productivity.

#### Disclosure Of Invention

The present invention is constructed as follows to solve the aforementioned issues.

According to a first aspect of the present invention, there is provided an electronic component mounting method comprising:

aligning in position electrodes of a circuit board with bumps formed by wire-bonding on electrodes of an electronic component with interposition of an insulative thermosetting resin that includes no conductive particle; and

hardening with heat the thermosetting resin interposed between the electronic component and the circuit board while correcting warp of the board by pressurizing the electronic component against the circuit board with a pressure force of not smaller than 20 gf per bump, thereby bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

According to a second aspect of the present invention, there is provided an electronic component mounting method according to the first aspect, wherein the positional alignment is executed by aligning in position the electrodes of the circuit board with the bumps formed by wire-bonding on the electrodes of the electronic component with interposition of the thermosetting resin without performing leveling, and

the bonding is executed by hardening with the heat the thermosetting resin interposed between the electronic component and the circuit board while simultaneously performing leveling of the bumps and correction of the warp of the board by pressurizing the electronic component against the circuit board with the pressure force of not smaller than 20 gf per bump, thereby bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

According to a third aspect of the present invention, there is provided an electronic component mounting method according to the first or second aspect, wherein the thermosetting resin is a thermosetting resin sheet having an anisotropic conductive film.

According to a fourth aspect of the present invention, there is provided an electronic component mounting method according to the first aspect, wherein the

positional alignment is executed after a solid thermosetting resin sheet having a shape dimension smaller than an outside dimension of connection between the electrodes of the electronic component is stuck as the thermosetting resin to the circuit board before the positional alignment, and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet, thereby bonding the electronic component and the circuit board together.

According to a fifth aspect of the present invention, there is provided an electronic component mounting method according to the first aspect, wherein a conductive adhesive is transferred onto the bumps of the electrodes of the electronic component before the positional alignment,

the positional alignment of the bumps with the electrodes of the circuit board is executed after a solid thermosetting resin sheet having a shape dimension smaller than an outside dimension of connection between the electrodes of the electronic component is stuck as the thermosetting resin to the circuit board before the

positional alignment, and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet, thereby bonding the electronic component and the circuit board together.

According to a sixth aspect of the present invention, there is provided an electronic component mounting method according to the first aspect, wherein the positional alignment of the bumps of the electrodes of the electronic component with the electrodes of the circuit board is executed after a solid thermosetting resin sheet whose one surface or both surfaces are provided with a flux layer is stuck as the thermosetting resin to the circuit board, and

the bonding is executed by hardening the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board by a heated head, thereby bonding the electronic component and the circuit board together as a consequence of

the bonding of the bumps to the electrodes of the circuit board due to adhesion of a flux component of the flux layer to the bumps occurring when the bumps break through the resin sheet.

5           According to a seventh aspect of the present invention, there is provided an electronic component mounting method according to the first aspect, wherein the positional alignment of the bumps of the electronic component with the electrodes of the circuit board is  
10       executed after a solid thermosetting resin sheet where particles comprised: of resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or gold balls are embedded in a direction  
15       in which the bumps and the electrodes of the circuit board are made mutually electrically continuous inside holes formed in positions corresponding to either the bumps of the electrodes of the electronic component or the electrodes of the circuit board before the positional alignment is stuck  
20       as the thermosetting resin to the electrodes of the circuit board through positional alignment, and

          the bonding is executed by hardening with heat the thermosetting resin sheet interposed between the electronic component and the circuit board while performing the  
25       correction of the warp of the circuit board by pressurizing

the electronic component against the circuit board with the heat applied to the thermosetting resin sheet.

According to an eighth aspect of the present invention, there is provided an electronic component mounting method according to the first aspect, wherein the positional alignment of the electrodes of the electronic component with the electrodes of the circuit board is executed after a solid thermosetting resin sheet where particles each of which has a size that is greater than a thickness of a passivation film to be coated on at least the electrodes of the electronic component and smaller than a thickness of one of the electrodes of the circuit board and each of which is comprised of: resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or gold balls are embedded inside holes formed in positions corresponding to either of the electrodes of the electronic component or the electrodes of the circuit board in a direction in which the particles are interposed between the electrode of the electronic component and the circuit electrode of the circuit board and in which the electrodes are made mutually electrically continuous before the positional alignment is stuck as the thermosetting resin to the electrodes of the circuit board through positional alignment when mounting the electronic

component on the circuit board, and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while  
5 pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet and with ultrasonic vibrations applied to the electronic component.

According to a ninth aspect of the present  
10 invention, there is provided an electronic component mounting method according to the third aspect, wherein the conductive particles included in the anisotropic conductive film are nickel particles plated with gold.

According to a tenth aspect of the present  
15 invention, there is provided an electronic component mounting method according to any one of the first through ninth aspects, wherein the thermosetting resin is provided by a thermosetting resin sheet.

According to an eleventh aspect of the present  
20 invention, there is provided an electronic component mounting method according to the tenth aspect, wherein the thermosetting resin sheet has a thickness greater than a gap between an active surface of the electronic component and a surface which belongs to the circuit board and on which the  
25 electrodes thereof are formed after the bonding.



According to a twelfth aspect of the present invention, there is provided an electronic component mounting method according to the first or second aspect, wherein the thermosetting resin is provided by a thermosetting adhesive.

According to a thirteenth aspect of the present invention, there is provided an electronic component mounting apparatus comprising:

a positional alignment device for aligning in position electrodes of a circuit board with bumps formed by wire-bonding on electrodes of an electronic component with interposition of an insulative thermosetting resin that includes no conductive particle;

a heating device for heating the thermosetting resin; and

a bonding device for hardening with heat the thermosetting resin interposed between the electronic component and the circuit board while correcting warp of the board by pressurizing the electronic component against the circuit board with a pressure force of not smaller than 20 gf per bump with the heat applied to the thermosetting resin from the heating device, thereby bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

According to a fourteenth aspect of the present

invention, there is provided an electronic component mounting apparatus according to the thirteenth aspect, wherein the positional alignment device is to align in position the electrodes of the circuit board with the bumps formed by wire-bonding on the electrodes of the electronic component with interposition of the thermosetting resin without performing leveling, and

the bonding device hardens with the heat the thermosetting resin interposed between the electronic component and the circuit board while simultaneously performing leveling of the bumps and correction of the warp of the board by pressurizing the electronic component against the circuit board with the pressure force of not smaller than 20 gf per bump with the heat applied to the thermosetting resin from the heating device, thereby bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

According to a fifteenth aspect of the present invention, there is provided an electronic component mounting apparatus according to the thirteenth or fourteenth aspect, wherein the thermosetting resin is a thermosetting resin sheet having an anisotropic conductive film.

According to a sixteenth aspect of the present invention, there is provided an electronic component mounting apparatus according to the thirteenth aspect,

wherein the positional alignment device sticks a solid thermosetting resin sheet having a shape dimension smaller than an outside dimension of connection between the electrodes of the electronic component as the thermosetting resin to the circuit board, and thereafter executes positional alignment of the bumps of the electrodes of the electronic component with the electrodes of the circuit board, and

the bonding device hardens with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet, thereby bonding the electronic component and the circuit board together.

According to a seventeenth aspect of the present invention, there is provided an electronic component mounting apparatus according to the thirteenth aspect, wherein a conductive adhesive is transferred onto the bumps of the electrodes of the electronic component before the positional alignment,

the positional alignment of the bumps with the electrodes of the circuit board is executed after a solid thermosetting resin sheet having a shape dimension smaller

than an outside dimension of connection between the electrodes of the electronic component is stuck as the thermosetting resin to the circuit board before the positional alignment, and

5 the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component  
10 against the circuit board with the heat applied to the thermosetting resin sheet, thereby bonding the electronic component and the circuit board together.

According to an eighteenth aspect of the present invention, there is provided an electronic component  
15 mounting apparatus according to the thirteenth aspect, wherein the positional alignment device sticks a solid thermosetting resin sheet whose one surface or both surfaces are provided with a flux layer as the thermosetting resin to the circuit board, and thereafter executes the positional  
20 alignment of the bumps of the electrodes of the electronic component with the electrodes of the circuit board, and

the bonding device hardens the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction  
25 of the warp of the circuit board by pressurizing the

electronic component against the circuit board by a heated head, thereby bonding the electronic component and the circuit board together as a consequence of the bonding of the bumps to the electrodes of the circuit board due to adhesion of a flux component of the flux layer to the bumps occurring when the bumps break through the resin sheet.

According to a nineteenth aspect of the present invention, there is provided an electronic component mounting apparatus according to the thirteenth aspect, wherein the positional alignment device sticks a solid thermosetting resin sheet where particles comprised of: resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or gold balls are embedded in a direction in which the bumps and the electrodes of the circuit board are made mutually electrically continuous inside holes formed in positions corresponding to either the bumps of the electrodes of the electronic component or the electrodes of the circuit board, to the electrodes of the circuit board through positional alignment as the thermosetting resin, and thereafter executes the positional alignment of the bumps of the electronic component with the electrodes of the circuit board, and

the bonding device hardens with the heat the

thermosetting resin sheet interposed between the electronic component and the circuit board while performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet so as to achieve the bonding.

According to a twentieth aspect of the present invention, there is provided an electronic component mounting apparatus according to the thirteenth aspect, wherein the positional alignment device sticks a solid thermosetting resin sheet where particles each of which has a size that is greater than a thickness of a passivation film to be coated on at least the electrodes of the electronic component and smaller than a thickness of one of the electrodes of the circuit board and are comprised of: resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or gold balls are embedded inside holes formed in positions corresponding to either the electrodes of the electronic component or the electrodes of the circuit board in a direction in which the particles are interposed between the electrodes of the electronic component and the circuit electrodes of the circuit board and in which the electrodes are made mutually electrically continuous, to the electrodes of the circuit

board through positional alignment as the thermosetting resin when mounting the electronic component on the circuit board, and thereafter executes the positional alignment of the electrodes of the electronic component with the electrodes of the circuit board, and

the bonding device hardens with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet and with ultrasonic vibrations applied to the electronic component so as to achieve the bonding.

According to a twenty-first aspect of the present invention, there is provided an electronic component mounting apparatus according to the fifteenth aspect, wherein the conductive particles included in the anisotropic conductive film are nickel particles plated with gold.

According to a twenty-second aspect of the present invention, there is provided an electronic component mounting apparatus according to any one of the thirteenth through twenty-first aspects, wherein the thermosetting resin is provided by a thermosetting resin sheet.

According to a twenty-third aspect of the present invention, there is provided an electronic component mounting apparatus according to the twenty-second aspect,

wherein the thermosetting resin sheet has a thickness greater than a gap between an active surface of the electronic component and a surface which belongs to the circuit board and on which the electrodes are formed after the bonding.

According to a twenty-fourth aspect of the present invention, there is provided an electronic component mounting apparatus according to the thirteenth or fourteenth aspect, wherein the thermosetting resin is provided by a thermosetting adhesive.

According to a twenty-fifth aspect of the present invention, there is provided an electronic component mounting apparatus according to any one of the twelfth through fourteenth aspects, wherein the positional alignment device and the bonding device are constructed of one device.

According to a twenty-sixth aspect of the present invention, there is provided an electronic component mounting method according to any one of the first through twelfth aspects, wherein a conductive paste is applied to the bumps after the positional alignment and before the bonding, and thereafter the conductive paste is hardened to function as part of the bump, making the hardened conductive paste break through the thermosetting resin during the bonding for the electrical connection between the conductive paste and the electrode of the circuit board.



According to a twenty-seventh aspect of the present invention, there is provided an electronic component mounting apparatus according to any one of the thirteenth through twenty-fifth aspects, wherein a conductive paste is applied to the bumps after the positional alignment and before the bonding, and thereafter the conductive paste is hardened to function as part of the bump, making the hardened conductive paste break through the thermosetting resin during the bonding for the electrical connection between the conductive paste and the electrode of the circuit board.

According to a twenty-eighth aspect of the present invention, there is provided an electronic component mounting method according to any one of the first through ninth aspects or the eleventh aspect, wherein the thermosetting resin sheet is arranged on a side of the circuit board.

According to a twenty-ninth aspect of the present invention, there is provided an electronic component mounting method according to any one of the first through ninth aspects or the eleventh aspect, wherein the thermosetting resin sheet is arranged on a side of the electronic component.

According to a thirtieth aspect of the present invention, there is provided an electronic component

mounting apparatus according to any one of the thirteenth through twenty-first aspects or the twenty-third aspect, wherein the thermosetting resin sheet is arranged on a side of the circuit board.

5           According to a thirty-first aspect of the present invention, there is provided an electronic component mounting apparatus according to any one of the thirteenth through twenty-first aspects or the twenty-third aspect, wherein the thermosetting resin sheet is arranged on a side  
10 of the electronic component.       According to the aforementioned aspects, for instance, a ball is formed of an Au wire through electric discharge by a wire bonder on Al of an IC chip or an electrode pad formed by incorporating Si, Cu, or the like into Al when mounting an electronic  
15 component such as an IC chip on a circuit board, and the ball is bonded to the electrode pad of the IC chip while applying ultrasonic waves to the ball by a capillary.

#### Brief Description Of Drawings

20           These and other aspects and features of the present invention will become clear from the following description taken in conjunction with the preferred embodiments thereof with reference to the accompanying drawings, in which:

25           Figs. 1A, 1B, 1C, 1D, 1E, 1F, 1G, 1H, 1I, and 1J are explanatory views showing a method for mounting an

electronic component such as an IC chip on a circuit board according to a first embodiment of the present invention;

Figs. 2A, 2B, 2C, 2D, 2E, 2F, and 2G are explanatory views showing a bump forming process by means of an IC chip wire bonder according to the mounting method of the first embodiment of the present invention;

Figs. 3A, 3B, and 3C are explanatory views showing a process for bonding an IC chip to a circuit board according to the mounting method of the first embodiment of the present invention;

Figs. 4A, 4B, and 4C are explanatory views showing a process for bonding an IC chip to a circuit board according to the mounting method of the first embodiment of the present invention;

Figs. 5A, 5B, 5C, 5D, 5E, and 5F are explanatory views showing a process for bonding an IC chip to a circuit board when an anisotropic conductive film is employed in place of a thermosetting resin sheet according to the mounting method of the first embodiment of the present invention;

Fig. 6 is an explanatory view showing a process for bonding an IC chip to a circuit board according to the embodiment of Fig. 5 of the first embodiment of the present invention;

Figs. 7A, 7B, and 7C are explanatory views showing

a process for bonding an IC chip to a circuit board by a mounting method according to a second embodiment of the present invention;

5 Figs. 8A, 8B, and 8C are explanatory views showing a process for bonding an IC chip to a circuit board by the mounting method of the second embodiment of the present invention;

10 Figs. 9A, 9B, 9C, 9D, and 9E are explanatory views showing a process for bonding an IC chip to a circuit board by a mounting method according to a third embodiment of the present invention;

15 Figs. 10A, 10B, 10C, 10D, 10E, and 10F are explanatory views showing a process for bonding an IC chip to a circuit board by a mounting method according to a fourth embodiment of the present invention;

Figs. 11A, 11B, 11C, 11D, 11E, 11F, and 11G are explanatory views showing a process for bonding an IC chip to a circuit board by a mounting method according to a fifth embodiment of the present invention;

20 Figs. 12A, 12B, 12C, 12D, 12E, 12F, 12G, and 12H are explanatory views showing a process for bonding an IC chip to a circuit board by a mounting method according to a sixth embodiment of the present invention;

25 Fig. 13 is a sectional view showing a prior art method for bonding an IC chip to a circuit board;

Figs. 14A and 14B are explanatory views showing a prior art method for bonding an IC chip to a circuit board; and

Figs. 15A, 15B, 15C, 15D, 15E, 15F, and 15G are explanatory views showing a process for bonding an IC chip to a circuit board by a mounting method according to a seventh embodiment of the present invention.

#### Best Mode for Carrying Out the Invention

Before the description of the present invention proceeds, it is to be noted that like parts are designated by like reference numerals throughout the accompanying drawings.

An IC chip mounting method and a manufacturing apparatus thereof according to a first embodiment of the present invention will be described with reference to Fig. 1A through Fig. 12H.

The method for mounting an IC chip on a circuit board according to the first embodiment of the present invention will be described with reference to Fig. 1A through Fig. 3C. On an IC chip 1 shown in Fig. 1A, bumps (protruding electrodes) 3 are formed on Al pad electrodes 2 of the IC chip 1 through the operations as shown in Figs. 2A through 2F by a wire bonder. That is, a ball 96 is formed at the lower end of a wire 95 that is protruding from a holder 93 in Fig. 2A, and the holder 93 that is holding the

wire 95 is moved down to bond the ball 93 to the electrode 2 of the IC chip 1, forming the approximate shape of the bump 3 as shown in Fig. 22B. In Fig. 2C, the holder 93 is started to move up with the wire 95 fed downward. The holder 93 is moved in an approximately rectangular loop 99 as shown in Fig. 2D to form a curved portion 98 on the bump 3 as shown in Fig. 2E, and the wire is torn off to form the bump 3 as shown in Fig. 2F. It is otherwise acceptable to clamp the wire 95 by the holder 93 in Fig. 2B and move up the holder 93 to pull up the wire, tearing off the gold wire 95 for the formation of the shape of the bump 3 as shown in Fig. 2G. The state in which the bumps 3 are formed on the electrodes 2 of the IC chip 1 as described above is shown in Fig. 1B.

Next, a thermosetting resin sheet 6 cut in a size slightly greater than the size of the IC chip 1 is placed on the electrodes 5 of the circuit board 4 shown in Fig. 1C in a manner as shown in Fig. 1D, and the thermosetting resin sheet 6 is stuck to the electrodes 5 of the board 4 with a pressure of, for example, about 5 to 10 kgf/cm<sup>2</sup> by a sticking tool 7 heated to, for example, 80 to 120°C. Subsequently, a separator 6a that is removably arranged on the tool 7 side of the thermosetting resin sheet 6 is peeled off to complete the preparation process of the board 4. This separator 6a is to prevent the thermosetting resin

sheet 6 from sticking to the tool 7. In this case, the thermosetting resin sheet 6 is preferably provided by a material including an inorganic filler such as silica (for example, epoxy resin, phenol resin, or polyimide) or a material including no inorganic filler (for example, epoxy resin, phenol resin, or polyimide) and has a degree of heat resistance capable of withstanding a high temperature in the subsequent reflow process (for example, a degree of heat resistance capable of withstanding a temperature of 240°C for ten seconds).

Next, as shown in Figs. 1E and 1F, the IC chip 1 on which the bumps 3 have been formed on the electrodes 2 in the aforementioned preceding process is aligned in position with the electrodes 5 that belong to the board 4 prepared in the preceding process and correspond to the electrodes 2 of the IC chip 1 and thereafter pressed, by a heated bonding tool 8. In this stage, the head portion 3a of the bump 3 is pressed against the electrode 5 of the board 4 while being deformed as shown in from Fig. 3A to Fig. 3B. In this stage, a load to be applied to the bump 3 via the IC chip 1 differs depending on the diameter of the bump 3. It is required to apply a degree of load with which the head portion 3a of the bump 3, bent and folded, is necessarily deformed as shown in Fig. 3C. This load is required to be 20 (gf) at a minimum. The upper limit of the load is determined so that no damage

occurs in the IC chip 1, the bump 3, the circuit board 4, and so on. Depending on cases, the maximum load may sometimes exceed 100 (gf). It is to be noted that the reference numerals 6m and 6s denote the thermosetting resin of the thermosetting resin sheet 6 being melted by the heat of the bonding tool 8 and the resin that has been thermally hardened after the melting.

It is to be noted that an positional alignment process for aligning in position the IC chip 1, on which the bumps 3 have been formed on the electrodes 2 in the aforementioned preceding process by the bonding tool 8 heated by a built-in heater 8a such as a ceramic heater or a pulse heater, with the electrodes 5 that belong to the board 4 and has been prepared in the aforementioned preceding process in correspondence with the electrodes 2 of the IC chip 1 as shown in Fig. 1E and Fig. 1F; and a process for pressure bonding them together after the positional alignment as shown in Fig. 1G may be executed by one position aligning-cum-pressure bonding device or, for example, a position aligning-cum-pressure bonding device of Fig. 1F. However, it is also acceptable to execute the positional alignment process by a positional alignment device of Fig. 4B and execute the pressure bonding process by a bonding device of Fig. 4C, i.e., by other devices in order to improve the productivity by simultaneously



executing the positional alignment work and the pressure bonding work when, for example, a number of boards are continuously produced. It is to be noted that Fig. 4C shows two bonding devices for enabling two portions of one circuit board 4 to be simultaneously pressure-bonded to improve the productivity.

In this case, the circuit board 4 is provided by a glass cloth base epoxy copper clad laminate board (glass epoxy board), a glass cloth base polyimide resin copper clad laminate board, or the like. These boards 4 have warp and undulation due to the thermal histeresis, cutting, and processing, meaning that their surfaces are not the complete flat surfaces. Therefore, as shown in Figs. 4A and 4B, by using the bonding tool 8 and a stage 9 of which the parallelism is controlled so as to be adjusted to, for example, about 5  $\mu\text{m}$  or less, heat and load are locally applied to the circuit board 4 through the IC chip 1 from the side of the bonding tool 8 toward the side of the stage 9, so that the warp of the portion of the circuit board 4 receiving the heat and load is corrected. The IC chip 1 is warped with a concave portion located around the center of its active surface. By pressurizing this with a heavy load of not smaller than 20 gf in the bonding stage, the warp and undulation of both the board 4 and the IC chip 1 can be corrected. The warp of the IC chip 1 is generated by an

internal stress occurring when the IC chip 1 is formed, that is, when a thin film is formed on Si.

In the state in which the warp of the circuit board 4 is corrected, heat of, for example, 140 to 230°C is applied to the thermosetting resin sheet 6 located between the IC chip 1 and the circuit board 4 for about several seconds to 20 seconds, so that this thermosetting resin sheet 6 is hardened. In this stage, the thermosetting resin that constitutes the thermosetting resin sheet 6 flows at the beginning to encapsulate the IC chip 1 up to its edges. The thermosetting resin is naturally softened in the early stage when heated because it is resin, and therefore, the resin gains fluidity to flow up to the edges. By making the thermosetting resin have a volume greater than the volume of a space between the IC chip 1 and the circuit board, the resin flows so as to ooze out of this space, thereby enabling the encapsulating effect to be produced. Subsequently, the heated tool 8 is moved up and the heat source is removed, thus abruptly reducing the temperatures of the IC chip 1 and the thermosetting resin sheet 6. Consequently, the thermosetting resin sheet 6 loses its fluidity, and as shown in Fig. 1G and Fig. 3C, the IC chip 1 is fixed on the circuit board 4 by the hardened thermosetting resin 6s. If the circuit board 4 is heated by the stage 9, then the temperature of the bonding tool 8 can

be set lower.

Instead of sticking the thermosetting resin sheet 6, it is acceptable to place a thermosetting adhesive 6b on the circuit board 4 by coating through dispensing or the like or printing or transfer as shown in Fig. 1H. When using the thermosetting adhesive 6b, basically the same processes as the aforementioned processes using the thermosetting resin sheet 6 are executed. When using the thermosetting resin sheet 6, there are the advantage that the sheet 6 is easy to handle because the thermosetting resin sheet 6 is solid, the advantage that the sheet 6 can be formed of polymer because no liquid component exists and the advantage that a sheet having a high glass transition point is easy to be formed. In contrast to this, when using the thermosetting adhesive 6b, the adhesive 6b can be coated, printed, or transferred in an arbitrary position and an arbitrary size on the board 4.

It is also acceptable to use an anisotropic conductive film (ACF) in place of the thermosetting resin, and by further using nickel powders plated with gold as conductive particles to be included in the anisotropic conductive film, the connection resistance value between the electrode 5 and the bump 3 can be reduced, to a further advantage.

The mounting process in the case where the

anisotropic conductive film 10 is used in place of the thermosetting resin sheet 6 as described above will be described with reference to Figs. 2A through 5F. On the IC chip 1 of Fig. 5A, bumps (protruding electrodes) 3 are formed on the Al pad electrodes 2 of the IC chip 1 by the wire bonder as shown in Fig. 5B through the operations shown in Figs. 2A through 2F. Otherwise, it is acceptable to tear off the gold wire 95 by clamping the wire 95 by the holder 93 and pulling the wire upward in Fig. 2B, forming a bump shape as shown in Fig. 2G.

Next, an anisotropic conductive film sheet 10 cut in a size slightly larger than the size of the IC chip 1 is placed on the electrodes 5 of the circuit board 4 of Fig. 5C as shown in Fig. 5D, and then stuck to the board 4 with a pressure of, for example, about 5 to 10 kgf/cm<sup>2</sup> by the sticking tool 7 heated to, for example, 80 to 120°C. Subsequently, by peeling off the separator on the tool side of the anisotropic conductive film sheet 10, the preparation process of the circuit board 4 is completed.

Next, as shown in Fig. 5E, the IC chip 1 on which the bumps 3 have been formed through the aforementioned processes are aligned in position with the electrodes 5 that belong to the board 4 prepared through the aforementioned processes and correspond to the IC chip 1, and pressed via the anisotropic conductive film sheet 10, by the heated

bonding tool 8. In this stage, the bump 3 is pressed against the electrode 5 of the board 4 with the head portion 3a of the bump 3 being deformed from the state of Fig. 3B to the state of Fig. 3C. In this stage, the load to be applied depends on the diameter of the bump 3, and the portion that belongs to the head portion 3a and is bent and folded is necessarily deformed as shown in Fig. 3C. In this case, when the conductive particles 10a inside the anisotropic conductive film sheet 10 are obtained by plating resin balls with a metal as shown in Fig. 6, the conductive particles 10a are required to be deformed. When the conductive particles 10a inside the anisotropic conductive film sheet 10 are metal particles of nickel or the like, it is required to apply a load such that the particles get into the bump 3 and the electrode 5 located on the board side. This load is required to be 20 (gf) at a minimum. The load may exceed 100 (gf) at a maximum.

In this case, the circuit board 4 is provided by a multilayer ceramic board, a glass cloth base epoxy copper clad laminate board (glass epoxy board), an aramid unwoven fabric board, a glass cloth base polyimide resin copper clad laminate board, FPC (Flexible printed circuit board), or the like. These boards 4 have warp and undulation due to the thermal hysteresis, cutting, and processing, meaning that their surfaces are not the complete flat surfaces.

Therefore, by locally applying heat and load to the circuit board 4 through the IC chip 1, the warp of the portion that belongs to the circuit board 4 and has received the heat and load is corrected.

5           Thus, in the state in which the warp of the circuit board 4 is corrected, heat of, for example, 140 to 230°C is applied to the anisotropic conductive film 10 between the IC chip 1 and the circuit board 4 for, for example, about several seconds to 20 seconds, so that this  
10           anisotropic conductive film 10 is hardened. In this stage, the thermosetting resin that constitutes the thermosetting resin sheet 6 flows at the beginning to encapsulate the IC chip 1 up to its edges. The thermosetting resin is naturally softened in the early stage when heated because  
15           the thermosetting resin is resin, and therefore, the resin gains fluidity to flow up to the edges. By making the thermosetting resin have a volume greater than the volume of a space between the IC chip 1 and the circuit board, the resin flows so as to ooze out of this space, thereby  
20           enabling the encapsulating effect to be produced. Subsequently, the heated tool 8 is moved up and the heat source is removed, thus abruptly reducing the temperatures of the IC chip 1 and the anisotropic conductive film 10. Consequently, the anisotropic conductive film 10 loses its  
25           fluidity, and as shown in Fig. 5F, the IC chip 1 is fixed on

the circuit board 4 by the resin 10s that has constituted the anisotropic conductive film 10. If the circuit board 4 is heated, then the temperature of the bonding tool 8 can be set lower.

5           With this arrangement, the anisotropic conductive film 10 can be employed in place of the thermosetting resin sheet 6, and by further using nickel powders plated with gold as conductive particles 10a to be included in the anisotropic conductive film 10, the connection resistance  
10           value can be reduced, to a further advantage.

Fig. 1A through Fig. 1H have described the formation of the thermosetting resin sheet 6 or the thermosetting adhesive 6b on the side of the circuit board 4. However, the present invention is not limited to this, and  
15           it is acceptable to form the thermosetting resin sheet 6 or the thermosetting adhesive 6b on the side of the IC chip 1 as shown in Fig. 1I or 1J. In this case, and particularly in the case of the thermosetting resin sheet 6, it is acceptable to press the IC chip 1 against an elastic body  
20           117 such as rubber together with the separator 6a removably arranged on the circuit board side of the thermosetting resin sheet 6 so that the thermosetting resin sheet 6 is stuck to the IC chip 1 along the shape of the bump 3.

A mounting method and apparatus according to a  
25           second embodiment of the present invention will be described

with reference to Figs. 7A through 7C and 8A through 8C. As described hereinabove, the protruding electrodes (bumps) 3 are formed on the electrodes 2 of the IC chip 1, while a sheet-shaped thermosetting resin or the thermosetting adhesive 6 having a shape dimension smaller than the outside dimension OL of the connection between the inner end edges of the electrodes 2 of the IC chip 1 is stuck to or coated on a center portion of the connection between the electrodes 5 of the circuit board 4, as shown in Figs. 7B, 7C, and 8A. Next, the bumps 3 and the electrodes 5 of the circuit board 4 are aligned in position. As shown in Fig. 7A and Fig. 8B, the IC chip 1 is pressed against the circuit board 4 by the heated head 8 to harden the thermosetting resin or the thermosetting adhesive 6 interposed between the IC chip 1 and the circuit board 4 while simultaneously performing the warp correction of the board 4. In this stage, the thermosetting resin or the thermosetting adhesive 6 is softened as described hereinbefore by the heat applied from the head 8 via the IC chip 1 and flows outwardly from the position to which the resin has been stuck as shown in Fig. 8C. This outflow thermosetting resin or thermosetting adhesive 6 becomes the encapsulation material (underfill) to remarkably improve the reliability of bonding of the bumps 3 to the electrodes 5. After a lapse of a certain time, the hardening of the thermosetting resin or the thermosetting



adhesive 6 gradually progresses, eventually bonding the IC chip 1 and the circuit board 4 together with the hardened resin 6s. By moving up the bonding tool 8 that is pressing the IC chip 1, the bonding of the IC chip 1 to the electrodes 5 of the circuit board 4 is completed. Strictly speaking, the reaction of the thermosetting resin progresses while heating in the case of the thermal hardening, and the fluidity almost disappears as the bonding tool 8 is moving up. According to the aforementioned method, the thermosetting resin or the thermosetting adhesive 6 is not covering the electrode 5 before the bonding. Therefore, the bumps 3 are brought in direct contact with the electrodes 5 during bonding, and the thermosetting resin or the thermosetting adhesive 6 does not flow beneath the electrode 5, so that the value of the connection resistance between the bump 3 and the electrode 5 can be reduced. If the circuit board is heated, then the temperature of the bonding head 8 can be further lowered.

A mounting method and apparatus according to a third embodiment of the present invention will be described next with reference to Figs. 9A through 9C. This third embodiment is a mounting method and apparatus for executing bonding after leveling.

First, as shown in Fig. 9A, the protruding electrodes (bumps) 3 are formed on the electrodes 2 on the

IC chip 1 by means of the wire bonder according to the method described hereinabove, and the bumps 3 are dipped in a conductive adhesive 11 accommodated in a pan-shaped vessel, transferring the conductive adhesive 11 onto the bumps 3.

5 On the other hand, a thermosetting resin sheet or the thermosetting adhesive 6 having a shape dimension  $L_2$  smaller than the outside dimension  $L_1$  of the connection between the electrodes 2 of the IC chip 1 is stuck to or coated on the center portion of the connection between the electrodes 5 of  
10 the circuit board 4. Next, the bumps 3 are aligned in position with the electrodes 5 of the circuit board 4 as shown in Fig. 9C, and the thermosetting resin or the thermosetting adhesive 6 interposed between the IC chip 1 and the circuit board 4 are hardened with the warp  
15 correction of the board 4 simultaneously performed by pressurizing the IC chip 1 against the circuit board 4, by the heated bonding head 8, so that the IC chip 1 and the board 4 are bonded together by the hardened resin 6s. In this stage, the thermosetting resin or the thermosetting  
20 adhesive 6 is softened by the heat applied from the bonding head 8 via the IC chip 1 as described hereinabove and flows outwardly while being pressurized from the position where the thermosetting resin or the thermosetting adhesive 6 is stuck as shown in Fig. 9B. This outflow thermosetting resin  
25 or the thermosetting adhesive 6 becomes an encapsulation

material (underfill), thereby remarkably improving the reliability of the bonding of the bumps 3 to the electrodes 5. Furthermore, the conductive adhesive 11 adhering to the bumps 3 is also hardened to allow the elimination of the heating process for hardening only the conductive adhesive 11. Subsequently, the tool 8 that is pressurizing the IC chip 1 is moved up. Through the aforementioned processes, the bonding of the IC chip 1 to the electrodes 5 of the board 4 is completed. If the circuit board side is heated, then the temperature of the bonding head 8 can be further lowered. It is also preferable to provide the setting of  $L_2 < LB$ . It is also acceptable to perform the heating within a short time and thereafter perform main heating by means of a furnace or the like. In this case, an equivalent operation can be achieved by using a resin that contracts when hardened. It is also acceptable to perform the underfill partially by this method as shown in Fig. 9D instead of performing the underfill wholly with the above resin and thereafter inject an underfill 400 as shown in Fig. 9E.

In Fig. 9A, if the tool 8 for holding the IC chip 1 is provided with a built-in heater 8 such as a ceramic heater or pulse heater and the conductive adhesive 11 is heated (from, for example, 60 to 200 °C) and hardened before performing the process of Fig. 9B so as to make the conductive adhesive 11 function as part of the bump 3, then

the conductive adhesive 11 is allowed to penetrate the thermosetting resin sheet or the thermosetting adhesive 6. Consequently, in this case, the thermosetting resin sheet or the thermosetting adhesive 6 having the shape dimension  $L_2$  smaller than the outside dimension  $L_1$  of the connection between the electrodes 2 of the IC chip 1 can be used. In other words, the size of the thermosetting resin sheet or the thermosetting adhesive 6 is not required to be taken into consideration at all. Similar to the aforementioned embodiment, the anisotropic conductive film 10 may be used in place of the thermosetting resin sheet or the thermosetting adhesive 6. Further, by providing the conductive particles 10a included in the anisotropic conductive film by nickel powder plated with gold, the value of the connection resistance between the bump 3 and the electrode 5 can be reduced, to a further advantage.

A mounting method and apparatus according to a fourth embodiment of the present invention will be described with reference to Figs. 10A through 10F. As shown in Fig. 10A, protruding electrodes (bumps) 3 are formed on the electrodes (pads) 2 on the IC chip 1 when mounting the IC chip 1 on the circuit board 4. On the other hand, as shown in Fig. 10B, a flux layer 12 is formed by coating and drying a flux component on one surface or both surfaces of the thermosetting resin sheet 6. Otherwise, the flux layer 12

is formed by sticking a flux component sheet formed by drying the flux component to the thermosetting resin sheet 6. As described above, the thermosetting resin sheet 6 having the flux layer 12 is stuck to the circuit board 4 as shown in Fig. 10C. In this case, the thermosetting resin sheet 6 is stuck so that the flux layer 12 comes in contact with the circuit board 4. Next, the bumps 3 are aligned in position with the electrodes 5 of the circuit board 4, and the IC chip 1 is pressed against the circuit board 4 by the heated head 8. In this stage, if the flux layer 12 is coated on the IC chip side of the thermosetting resin sheet 6 as shown in Fig. 10E, then the bumps 3 come in contact with the flux layer 12 of the thermosetting resin sheet 6 and adheres to the same. The flux layer 12 formed on the board side of the thermosetting resin sheet 6 adheres to a bonding metal layer 13 formed on the electrodes 5 located on the board side when the thermosetting resin sheet 6 is stuck to the board 4 as shown in Fig. 10D. If the IC chip 1 is pressed against the circuit board 4 by the head 8, then the heat from the head 8 is conducted to the thermosetting resin sheet 6 via the IC chip 1 and activates the flux component of the flux layer 12 while simultaneously performing the warp correction of the board 4. Further, the thermosetting resin sheet 6 interposed between the IC chip 1 and the circuit board 4 is hardened. The flux of the flux layer 12 adheres to the

bumps 3 when the bumps 3 penetrate the resin sheet 6 and comes in contact with the bonding metal layer 13 that has been melted by heat and formed on the electrodes 5 of the circuit board 4, by which the bumps 3 and the electrodes 5 come in contact with each other via the flux and the bonding metal layer 13 to bond the IC chip 1 to the electrode 5 as shown in Fig. 10F.

If a metal that melts at a relatively low temperature of not greater than 300°C is used as the bump 3, then the bonding metal layer 13 is, of course, not required to be provided on the circuit board 4. If the circuit board side is heated, then the temperature of the bonding head 8 can be further lowered.

It is a matter of course that the thermosetting adhesive or the anisotropic conductive film sheet 10 may be employed in place of the thermosetting resin sheet 6 in the present embodiment, similarly to the aforementioned embodiment.

A mounting method and apparatus according to a fifth embodiment of the present invention will be described with reference to Figs. 11A through 11G. This fifth embodiment is a mounting method and apparatus that does not executes the leveling at all regardless of whether simultaneous or not.

As shown in Fig. 11E and 11F, protruding

electrodes (bumps) 3 are preparatorily formed on the electrodes 2 of the IC chip 1 by means of a wire bonder (not shown) when mounting the IC chip 1 on the circuit board 4. As shown in Figs. 11A and 11B, through holes 15 that penetrate in a direction (direction of thickness of the resin sheet 6) in which the bumps 3 and the electrodes 5 of the circuit board 4 are brought in contact with each other and made conductive in the positions corresponding to the bumps 3 and the electrodes 5 of the circuit board 4 are formed through the thermosetting resin sheet 6. Then, as shown in Figs. 11C and 11D, conductive particles 14 constructed of, for example, resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or particles comprised of gold balls formed in paste form are embedded in the through holes 15 by printing, pressing-in by a squeegee, or the like, forming a thermosetting resin sheet 66 having an electrical conductivity. The thus-formed resin sheet 66 is stuck to the electrodes 5 of the circuit board 4 through positional alignment as shown in Figs. 11E and 11F. When the conductive particles 14 in the paste form are used, by increasing the viscosity of the paste than the viscosity when the thermosetting adhesive of the thermosetting resin sheet 66 is bonded, the paste becomes hard to be pushed and

flown by the resin of the thermosetting resin sheet 66 when the IC chip 1 is pressed, to a further advantage. Next, as shown in Figs. 11E and 11F, the bumps 3 of the IC chip 1 are aligned in position with the electrodes 5 of the circuit board 4, and the IC chip 1 is pressed against the circuit board 4 by the heated bonding head 8 to harden the thermosetting resin in the thermosetting resin sheet 66 interposed between the IC chip 1 and the circuit board 4 while simultaneously performing the leveling of the bumps 3 and the warp correction of the board 4, so that as shown in Fig. 11G, the IC chip 1 is bonded to the circuit board 4 by the hardened resin 66s. If the circuit board side is heated, the temperature of the bonding head 8 can be further lowered.

A mounting method and apparatus according to a sixth embodiment of the present invention will be described next with reference to Figs. 12A through 12H. This sixth embodiment is a mounting method and apparatus that does not execute the leveling at all regardless of whether simultaneous or not.

In Fig. 12A, holes 15 are formed through the thermosetting resin sheet 66 in the positions corresponding to the electrodes 5 of the circuit board 4 in the direction of conduction to the electrode 5 of the circuit board 4 with interposition of the thermosetting resin sheet 66, and as shown in Fig. 12B, conductive particles 16 are inserted in



the holes 15. This conductive particle 16 preferably has a particle diameter of a size that is at least greater than the thickness  $t_{pc}$  (see Fig. 12H) of a passivation film 1a to cover the electrode 2 of the IC chip 1 and smaller than the thickness  $t_e$  (see Fig. 12C) of the electrode 5 of the board 4 and preferably be provided by a conductive particle 16 obtained by plating the surface of a resin ball 16a with gold as shown in Fig. 12F; or a conductive particle 17 obtained by plating the surface of a nickel particle 17a with gold 17b as shown in Fig. 12E; or a conductive particle 18 constructed of silver, silver-palladium, or gold itself as shown in Fig. 12G; or a conductive paste; or a particle comprised of a gold ball. Next, as shown in Fig. 12C, the electrodes 2 of the IC chip 1 are stuck to the electrodes 5 of the circuit board 4 through positional alignment, and thereafter the electrodes 2 of the IC chip 1 are aligned in position with the electrodes 5 of the circuit board 4. Similarly to the aforementioned embodiment, the IC chip 1 is pressed against the circuit board 4 by the heated bonding head 8 with ultrasonic wave vibrations applied to the IC chip 1 from an ultrasonic wave vibration generator connected to the head 8 via the head 8, by which the Al electrodes 2 of the IC chip 1 and the electrodes 5 of the circuit board 4 are bonded together via the metal on the surface of the conductive particle 16. At the same time, the thermosetting

resin sheet 66 interposed between the IC chip 1 and the circuit board 4 is hardened to bond the IC chip 1 and the circuit board 4 together by the hardened resin 66s as shown in Fig. 12D. The surface of the electrode 5 of the circuit board 4 is preferably plated with gold. If the circuit board side is heated, the temperature of the bonding head 8 can be further lowered. In this case, the ultrasonic wave can break the oxide of the Al film on the pads of the IC chip 1 so as to expose pure Al. The temperature in the bonding stage can be lowered and Au-Al alloying can also be promoted. It is to be noted that the thermosetting adhesive or the anisotropic conductive film 10 can be used in place of the thermosetting resin sheet in the above embodiment, similarly to the foregoing embodiments.

A mounting method and apparatus according to a seventh embodiment of the present invention will be described next with reference to Figs. 15A through 15H. This seventh embodiment is a mounting method and apparatus that executes leveling simultaneously with bonding.

The bumps 3 formed on the electrodes 2 of the IC chip 1 shown in Fig. 15A are dipped in a conductive paste 100 in a conductive paste vessel 101 with the IC chip 1 held by the tool 8 as shown in Fig. 15B, the conductive paste 100 is made to adhere to the bumps 3 as shown in Fig. 15C. Subsequently, as shown in Fig. 15C, the conductive paste 100

is heated by the built-in heater 8a and hardened as shown in Fig. 15C, by which easier penetration through the thermosetting resin sheet 6 or the thermosetting adhesive 6b can be achieved in the next process. That is, this

5 conductive paste 100 functions as part of the bumps 3. Subsequently, the IC chip 1 is pressed against the circuit board 4 as shown in Fig. 15E so that the bumps 3 are brought in contact with the electrodes 5 of the circuit board 4 on which the thermosetting resin sheet 6 shown in Fig. 15D is

10 placed or the electrodes 5 of the circuit board 4 on which the thermosetting adhesive 6b shown in Fig. 15G is placed. Consequently, as shown in Fig. 15F, the bumps 3 and the electrodes 5 are electrically connected to each other via the conductive paste 100, or according to circumstances, the

15 bumps 3 are electrically directly connected to the electrodes 5. By thus interposing the conductive paste 100, the bumps 3 that are unevenly leveled can be connected to the electrodes 5. In this stage, the warp correction of the board 4 can be simultaneously achieved when bonding the IC

20 chip 1 to the circuit board 4 with pressure by the heated bonding head 8, similarly to the foregoing embodiment. The conductive paste 100 can be provided by a variety of types as described hereinabove.

In the aforementioned various embodiments, the

25 thermosetting adhesive can be used in place of the

thermosetting resin sheet. The anisotropic conductive film  
10 can also be used in place of the thermosetting adhesive.  
In this case, if nickel particles plated with gold are  
further used as the conductive particles included in the  
5 anisotropic conductive film 10, then the value of the  
connection resistance between the bump 3 and the electrode 5  
can be further lowered, to a further advantage.

According to the present invention, a number of  
processes that have conventional been necessary for bonding  
10 an electronic component such as an IC chip and a circuit  
board together can be eliminated, by which the productivity  
is remarkably improved. In the case where a thermosetting  
resin sheet or a thermosetting adhesive having no conductive  
particle is used as the bonding material, an IC chip  
15 mounting method that is less expensive than the method  
described in connection with the second prior art example  
can be provided.

The following effects can also be produced.

(1) Bump formation

20 According to the method for forming the bump with  
plating (third prior art example), the semiconductor  
manufacturers are required to perform special bump formation  
processes, meaning that only the limited manufacturers can  
achieve the bump formation. However, according to the  
25 method of the present invention, general IC chips for

general-purpose wire-bonding can be used with the wire bonder, and this can facilitate the obtainment of IC chips.

In comparison with the method of the first prior art example, the bump leveling for stabilizing the amount of transfer of the adhesive in an unstable transfer process for transferring a conductive adhesive can be eliminated, and this can obviate the need for the leveling device for such a leveling process.

According to the method of the fifth embodiment of the present invention, the bump formation on the IC chip can be eliminated, and this enables the provision of a mounting method that is simpler and inexpensive and has high productivity.

#### (2) Bonding of IC chip to circuit board

According to the method of the second prior art example, the connection resistance has depended on the number of conductive particles existing between the bumps and the electrodes of the circuit board. However, according to the present invention, the electronic component is bonded by being pressed against the electrodes of the circuit board with a load greater than that of the first and second prior art examples without performing the leveling in the leveling process that serves as an independent process. Therefore, the connection resistance value does not depend on the number of interposed particles, so that the connection

resistance value can be stably obtained.

The bump leveling is executed simultaneously with the bonding, and therefore, no independent leveling process is necessary. Furthermore, the warp or undulation of the circuit board are deformed during bonding so as to execute the bonding through correction, or the warp or undulation of the circuit board are deformed during bonding so as to execute the bonding through correction without requiring the bump leveling by deforming the conductive paste during bonding through the hardening of the conductive paste that has applied to the bumps. Therefore, the method is tolerant to the warp and undulation. It has been required to uniform the board and the bumps with high accuracy as exemplified by 10  $\mu\text{m}/\text{IC}$  (meaning that a thickness and warp dimensional accuracy of 10  $\mu\text{m}$  is required per IC chip) of the first prior art example, 2  $\mu\text{m}/\text{IC}$  of the second prior art example and 1  $\mu\text{m}/\text{IC}$  (bump height variation of not larger than  $\pm 1 \mu\text{m}$ ) of the third prior art example. Therefore, in practice, a glass board is used as represented by LCD. However, according to the method of the present invention, the resin board, flexible board, multilayer ceramic board, and the like can be employed as described in connection with the aforementioned embodiments, and this enables the provision of a low-cost general-purpose IC chip mounting method.

Furthermore, there is no need for providing the

encapsulation resin (underfill coat) beneath the IC chip after the bonding of the IC chip to the circuit board with a conductive adhesive that has been necessary for the first prior art example, and this enables the reduction of the process.

The holes 15 formed through the thermosetting resin sheet 66 is preferably formed in either the positions of the electrodes 2 of the IC chip 1 or the bumps 3 or the positions of the electrodes 5 of the circuit board 4. For example, if the number of the electrodes 5 of the circuit board 4 is greater than the number of the electrodes 2 of the IC chip 1, then it is proper to form the holes 15 corresponding to the number necessary for the bonding of the electrodes 2 of the IC chip 1, i.e., the positions and number of the electrodes 2 of the IC chip 1.

As described above, the present invention can provide the method and apparatus for bonding an IC chip and a circuit board together, which has a productivity superior to and less expensive than any one of the bonding methods of the bonding methods that have conventional existed.

The entire disclosure of Japanese Patent Application No. 8-350738 filed on December 27, 1996, including specification, claims, drawings, and summary are incorporated herein by reference in its entirety.

Although the present invention has been fully

described in connection with the preferred embodiments thereof with reference to the accompanying drawings, it is to be noted that various changes and modifications are apparent to those skilled in the art. Such changes and  
5 modifications are to be understood as included within the scope of the present invention as defined by the appended claims unless they depart therefrom.

662290 "S97E60



## CLAIMS

1. An electronic component mounting method comprising:

aligning in position electrodes (5) of a circuit  
5 board (4) with bumps (3) formed by wire-bonding on  
electrodes (2) of an electronic component (1) with  
interposition of an insulative thermosetting resin (6, 6b)  
that includes no conductive particle; and

hardening with heat the thermosetting resin  
10 interposed between the electronic component and the circuit  
board while correcting warp of the board by pressurizing the  
electronic component against the circuit board with a  
pressure force of not smaller than 20 gf per bump, thereby  
bonding the electronic component and the circuit board  
15 together for electrical connection between both the  
electrodes thereof.

2. An electronic component mounting method as claimed  
in claim 1, wherein

the positional alignment is executed by aligning  
20 in position the electrodes (5) of the circuit board (4) with  
the bumps (3) formed by wire-bonding on the electrodes (2)  
of the electronic component (1) with interposition of the  
thermosetting resin (6, 6b) without performing leveling, and

the bonding is executed by hardening with the heat  
25 the thermosetting resin interposed between the electronic

component and the circuit board while simultaneously performing leveling of the bumps and correction of the warp of the board by pressurizing the electronic component against the circuit board with the pressure force of not smaller than 20 gf per bump, thereby bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

3. An electronic component mounting method as claimed in claim 1 or 2, wherein

the thermosetting resin is a thermosetting resin sheet (10) having an anisotropic conductive film.

4. An electronic component mounting method as claimed in claim 1, wherein

the positional alignment is executed after a solid thermosetting resin sheet (6) having a shape dimension smaller than an outside dimension (OL) of connection between the electrodes (2) of the electronic component (1) is stuck as the thermosetting resin to the circuit board (4) before the positional alignment, and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the

thermosetting resin sheet (6), thereby bonding the electronic component and the circuit board together.

5. An electronic component mounting method as claimed in claim 1, wherein

5 a conductive adhesive (11) is transferred onto the bumps (3) of the electrodes (2) of the electronic component (1) before the positional alignment,

the positional alignment of the bumps with the electrodes (5) of the circuit board is executed after a  
10 solid thermosetting resin sheet (6) having a shape dimension smaller than an outside dimension of connection between the electrodes of the electronic component is stuck as the thermosetting resin to the circuit board (4) before the positional alignment, and

15 the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component  
20 against the circuit board with the heat applied to the thermosetting resin sheet (6), thereby bonding the electronic component and the circuit board together.

6. An electronic component mounting method as claimed in claim 1, wherein

25 the positional alignment of the bumps (3) of the

electrodes (2) of the electronic component (1) with the electrodes (5) of the circuit board is executed after a solid thermosetting resin sheet (6) whose one surface or both surfaces are provided with a flux layer (12) is stuck  
5 as the thermosetting resin to the circuit board (4), and

the bonding is executed by hardening the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board  
10 by pressurizing the electronic component against the circuit board by a heated head (8), thereby bonding the electronic component and the circuit board together as a consequence of the bonding of the bumps to the electrodes of the circuit board due to adhesion of a flux component of the flux layer  
15 to the bumps occurring when the bumps break through the resin sheet.

7. An electronic component mounting method as claimed in claim 1, wherein

the positional alignment of the bumps of the  
20 electronic component with the electrodes of the circuit board is executed after a solid thermosetting resin sheet (66) where particles (14) comprised of: resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or  
25 gold; or a conductive paste; or gold balls are embedded in a

direction in which the bumps and the electrodes of the circuit board are made mutually electrically continuous inside holes (15) formed in positions corresponding to either the bumps (3) of the electrodes (2) of the electronic component (1) or the electrodes (5) of the circuit board (4) before the positional alignment is stuck as the thermosetting resin to the electrode of the circuit board through positional alignment, and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet (6).

8. An electronic component mounting method as claimed in claim 1, wherein

the positional alignment of the electrodes of the electronic component with the electrodes of the circuit board is executed after a solid thermosetting resin sheet (66) where particles (16) each of which has a size that is greater than a thickness ( $t_{pc}$ ) of a passivation film (1a) to be coated on at least the electrodes (2) of the electronic component and smaller than a thickness ( $t_{pcb}$ ) of one of the electrodes of the circuit board and each of which is

comprised of: resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or gold balls are embedded inside holes (15) formed in positions corresponding to either the electrodes (2) of the electronic component or the electrodes (5) of the circuit board in a direction in which the particles (16) are interposed between the electrode of the electronic component and the circuit electrode of the circuit board and in which the electrodes are made mutually electrically continuous before the positional alignment is stuck as the thermosetting resin to the electrode of the circuit board through positional alignment when mounting the electronic component (1) on the circuit board (4), and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet (6) and with ultrasonic vibrations applied to the electronic component.

9. An electronic component mounting method as claimed in claim 3, wherein

the conductive particles included in the anisotropic conductive film (10) are nickel particles plated

with gold.

10. An electronic component mounting method as claimed in any one of claims 1 through 9, wherein

the thermosetting resin is provided by the thermosetting resin sheet (6).

11. An electronic component mounting method as claimed in claim 10, wherein

the thermosetting resin sheet (6) has a thickness greater than a gap between an active surface of the electronic component and a surface which belongs to the circuit board and on which the electrodes (5) thereof are formed after the bonding.

12. An electronic component mounting method as claimed in claim 1 or 2, wherein

the thermosetting resin is provided by the thermosetting adhesive (6b).

13. An electronic component mounting apparatus comprising:

a positional alignment device for aligning in position electrodes (5) of a circuit board (4) with bumps (3) formed by wire-bonding on electrodes (2) of an electronic component (1) with interposition of an insulative thermosetting resin (6, 6b) that includes no conductive particle;

a heating device (8a) for heating the

thermosetting resin (6, 6b); and

a bonding device for hardening with heat the thermosetting resin interposed between the electronic component and the circuit board while correcting warp of the board by pressurizing the electronic component against the circuit board with a pressure force of not smaller than 20 gf per bump with the heat applied to the thermosetting resin (6, 6b) from the heating device, thereby bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

14. An electronic component mounting apparatus as claimed in claim 13, wherein

the positional alignment device is to align in position the electrodes (5) of the circuit board (4) with the bumps (3) formed by wire-bonding on the electrodes (2) of the electronic component (1) with interposition of the thermosetting resin (6, 6b) without performing leveling, and

the bonding device hardens with the heat the thermosetting resin interposed between the electronic component and the circuit board while simultaneously performing leveling of the bumps and correction of the warp of the board by pressurizing the electronic component against the circuit board with the pressure force of not smaller than 20 gf per bump with the heat applied to the thermosetting resin (6, 6b) from the heating device, thereby



bonding the electronic component and the circuit board together for electrical connection between both the electrodes thereof.

15. An electronic component mounting apparatus as  
5 claimed in claim 13 or 14, wherein

the thermosetting resin is a thermosetting resin sheet (10) having an anisotropic conductive film.

16. An electronic component mounting apparatus as  
claimed in claim 13, wherein

10 the positional alignment device sticks a solid thermosetting resin sheet (6) having a shape dimension smaller than an outside dimension (OL) of connection between the electrodes (2) of the electronic component (1) as the thermosetting resin to the circuit board (4), and thereafter  
15 executes positional alignment of the bumps (3) of the electrodes of the electronic component with the electrodes (5) of the circuit board, and

the bonding device hardens with the heat the thermosetting resin sheet interposed between the electronic  
20 component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet (6), thereby bonding the electronic component and the  
25 circuit board together.

17. An electronic component mounting apparatus as claimed in claim 13, wherein

a conductive adhesive (11) is transferred onto the bumps (3) of the electrodes (2) of the electronic component (1) before the positional alignment,

the positional alignment of the bumps with the electrodes (5) of the circuit board is executed after a solid thermosetting resin sheet (6) having a shape dimension smaller than an outside dimension of connection between the electrodes of the electronic component is stuck as the thermosetting resin to the circuit board (4) before the positional alignment, and

the bonding is executed by hardening with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet (6), thereby bonding the electronic component and the circuit board together.

18. An electronic component mounting apparatus as claimed in claim 13, wherein

the positional alignment device sticks a solid thermosetting resin sheet (6) whose one surface or both surfaces are provided with a flux layer (12) as the

thermosetting resin to the circuit board (4), and thereafter executes the positional alignment of the bumps (3) of the electrodes (2) of the electronic component (1) with the electrodes (5) of the circuit board, and

5           the positional alignment hardens the thermosetting resin sheet interposed between the electronic component and the circuit board while simultaneously performing the correction of the warp of the circuit board by pressurizing the electronic component against the circuit board by a  
10   heated head (8), thereby bonding the electronic component and the circuit board together as a consequence of the bonding of the bumps to the electrodes of the circuit board due to adhesion of a flux component of the flux layer to the bumps occurring when the bumps break through the resin sheet.

15   19.       An electronic component mounting apparatus as claimed in claim 13, wherein

          the positional alignment device sticks a solid thermosetting resin sheet (66) where particles (14) comprised of: resin balls whose surfaces are plated with  
20   gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a conductive paste; or gold balls are embedded in a direction in which the bumps and the electrodes of the circuit board are made mutually electrically continuous inside holes (15) formed in  
25   positions corresponding to either the bumps (3) of the

electrodes (2) of the electronic component (1) or the electrodes (5) of the circuit board (4), to the electrodes of the circuit board through positional alignment as the thermosetting resin, and thereafter executes the positional  
 5 alignment of the bumps of the electronic component with the electrodes of the circuit board, and

the bonding device hardens with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while performing the  
 10 correction of the warp of the circuit board by pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet (6) so as to achieve the bonding.

20. An electronic component mounting apparatus as  
 15 claimed in claim 13, wherein

the positional alignment device sticks a solid thermosetting resin sheet (66) where particles (16) each of which has a size that is greater than a thickness ( $t_{pc}$ ) of a passivation film (1a) to be coated on at least the  
 20 electrodes (2) of the electronic component and smaller than a thickness ( $t_{pcb}$ ) of one of the electrodes of the circuit board and are comprised of: resin balls whose surfaces are plated with gold; or nickel particles; or conductive particles made of silver, silver-palladium, or gold; or a  
 25 conductive paste; or gold balls are embedded inside holes

(15) formed in positions corresponding to either the electrodes (2) of the electronic component or the electrodes (5) of the circuit board in a direction in which the particles (16) are interposed between the electrodes of the electronic component and the circuit electrodes of the circuit board and in which the electrodes are made mutually electrically continuous, to the electrodes of the circuit board through positional alignment as the thermosetting resin when mounting the electronic component (1) on the circuit board (4), and thereafter executes the positional alignment of the electrodes of the electronic component with the electrodes of the circuit board, and

the bonding device hardens with the heat the thermosetting resin sheet interposed between the electronic component and the circuit board while pressurizing the electronic component against the circuit board with the heat applied to the thermosetting resin sheet (6) and with ultrasonic vibrations applied to the electronic component so as to achieve the bonding.

21. An electronic component mounting apparatus as claimed in claim 15, wherein

the conductive particles included in the anisotropic conductive film (10) are nickel particles plated with gold.

22. An electronic component mounting apparatus as

claimed in any one of claims 13 through 21, wherein

the thermosetting resin is provided by the thermosetting resin sheet (6).

23. An electronic component mounting apparatus as  
5 claimed in claim 22, wherein

the thermosetting resin sheet (6) has a thickness greater than a gap between an active surface of the electronic component and a surface which belongs to the circuit board and on which the electrodes (5) are formed  
10 after the bonding.

24. An electronic component mounting apparatus as claimed in claim 13 or 14, wherein

the thermosetting resin is provided by the thermosetting adhesive (6b).

15 25. An electronic component mounting apparatus as claimed in any one of claims 12 through 14, wherein

the positional alignment device and the bonding device are constructed of one device.

26. An electronic component mounting method as claimed  
20 in any one of claims 1 through 12, wherein

a conductive paste (100) is applied to the bumps after the positional alignment and before the bonding, and thereafter the conductive paste is hardened to function as part of the bump, making the hardened conductive paste break  
25 through the thermosetting resin during the bonding for the

electrical connection between the conductive paste and the electrode of the circuit board.

27. An electronic component mounting apparatus as claimed in any one of claims 13 through 25, wherein

5 a conductive paste (100) is applied to the bumps after the positional alignment and before the bonding, and thereafter the conductive paste is hardened to function as part of the bump, making the hardened conductive paste break through the thermosetting resin during the bonding for the  
10 electrical connection between the conductive paste and the electrode of the circuit board.

28. An electronic component mounting method as claimed in any one of claims 1 through 9 or 11, wherein

15 the thermosetting resin sheet is arranged on a side of the circuit board.

29. An electronic component mounting method as claimed in any one of claims 1 through 9 or 11, wherein

the thermosetting resin sheet is arranged on a side of the electronic component.

20 30. An electronic component mounting apparatus as claimed in any one of claims 13 through 21 or 23, wherein

the thermosetting resin sheet is arranged on a side of the circuit board.

31. An electronic component mounting apparatus as  
25 claimed in any one of claims 13 through 21 or 23, wherein

the thermosetting resin sheet is arranged on a side of the electronic component.



## ABSTRACT

When mounting an IC chip 1 on a circuit board 4, bumps 3 are formed on electrodes 2 on the IC chip, and the bumps and the electrodes of the circuit board are aligned in position with each other with interposition of an insulative thermosetting resin 6 having no conductive particle between the electrodes of the circuit board and the bumps. The IC chip is pressed against the circuit board with a pressure force of not smaller than 20 gf per bump by a heated head 8 so as to perform warp correction of the IC chip and the board, while the resin interposed between the IC chip and the circuit board is hardened to bond the IC chip and the circuit board together.

Fig.1A




Fig.1C




Fig.1B




Fig.1D

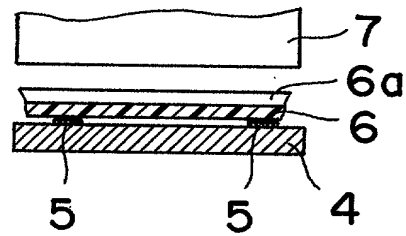


Fig.1E

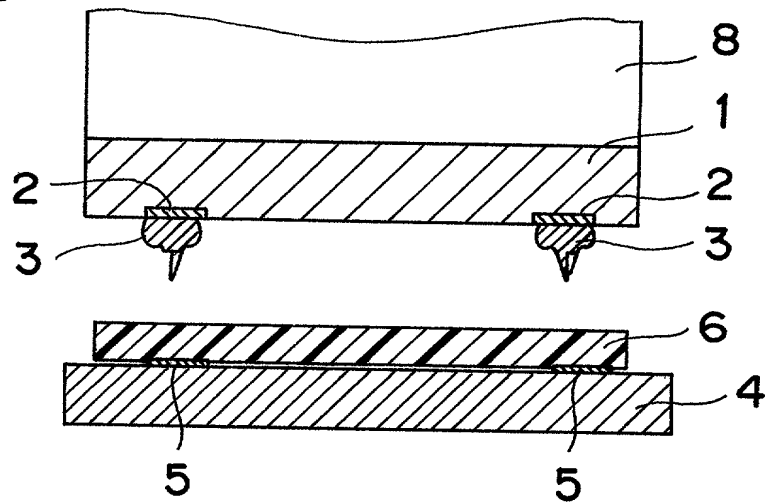


Fig.1F

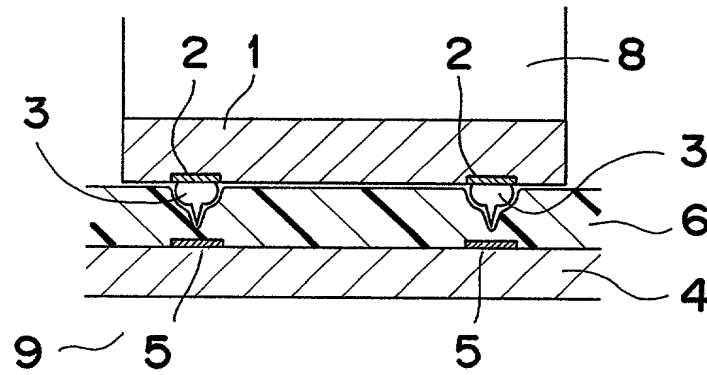


Fig.1G

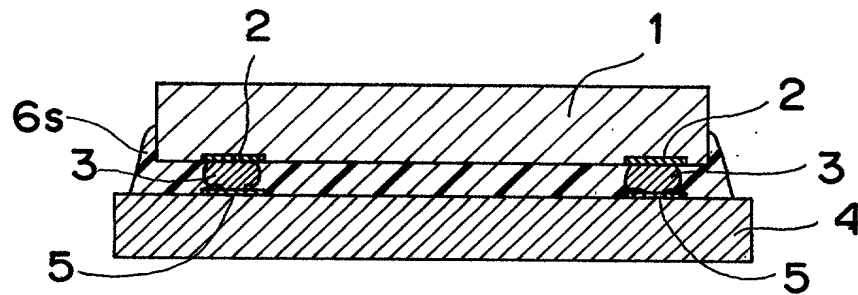


Fig. 1H

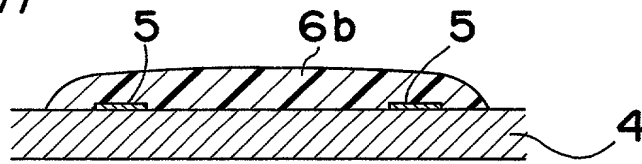


Fig. 1I

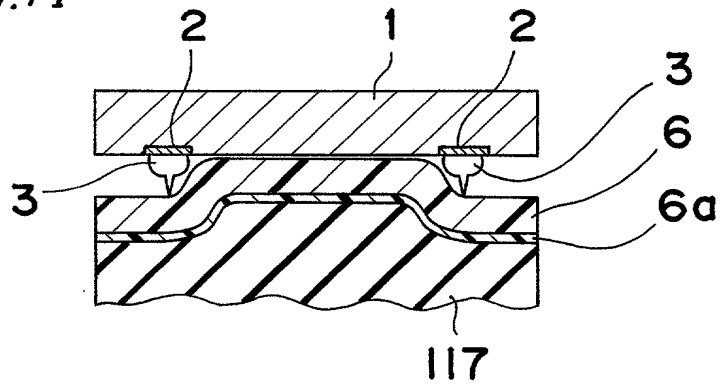
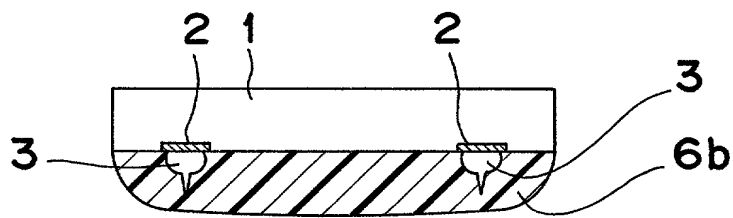
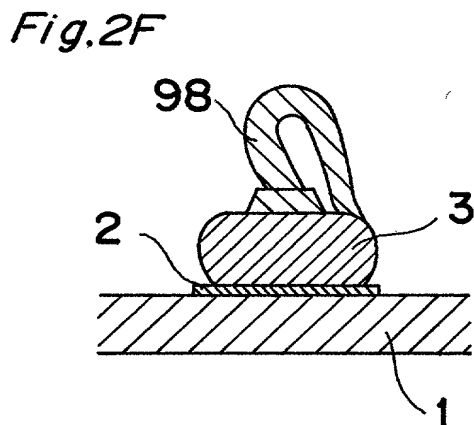
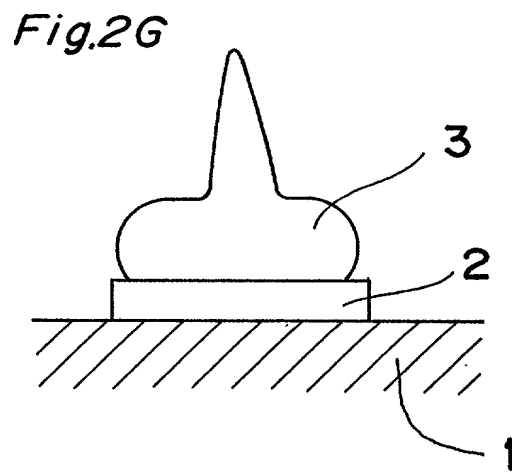
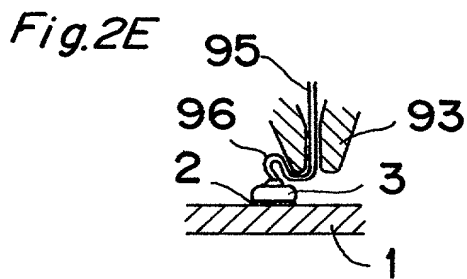
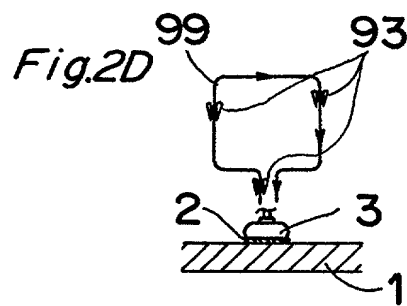
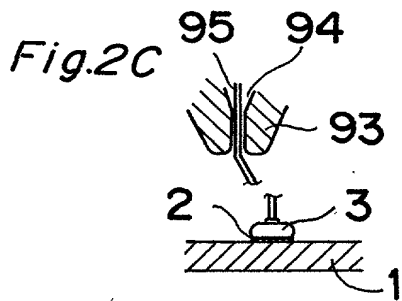

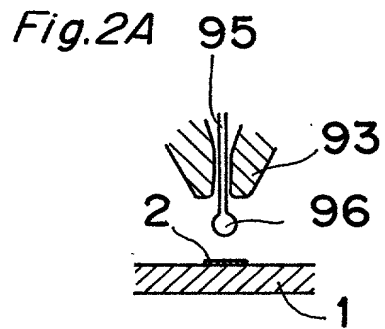
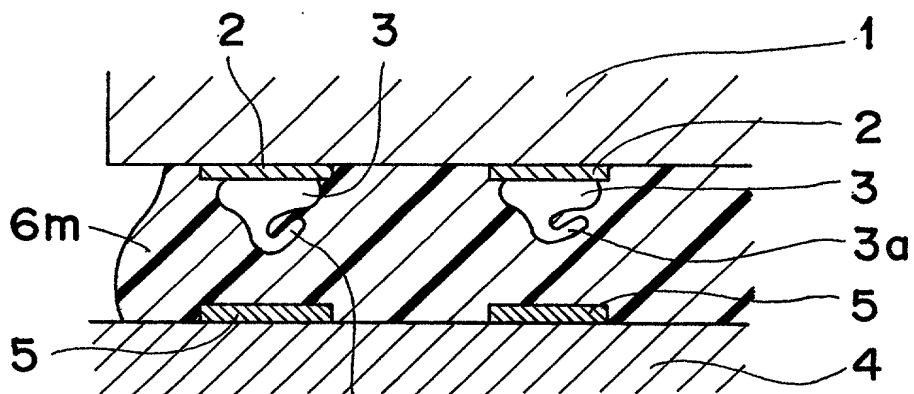


Fig. 1J

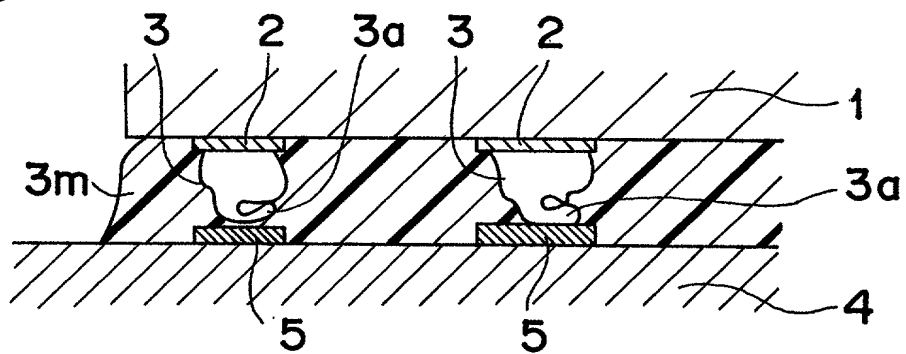




*Fig. 3A*



*Fig. 3B*



*Fig.3C*

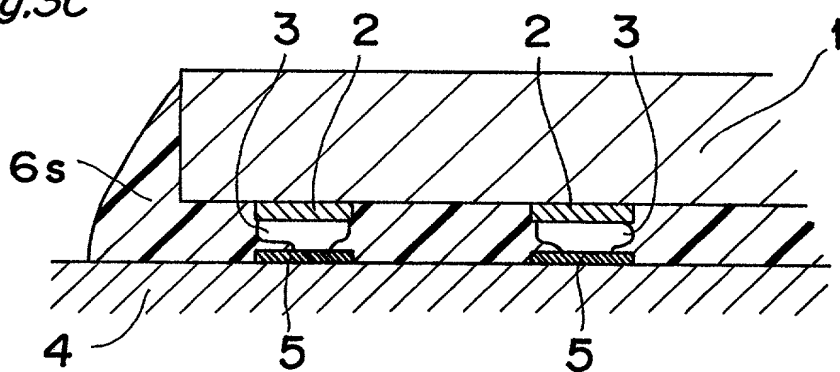


Fig.4A

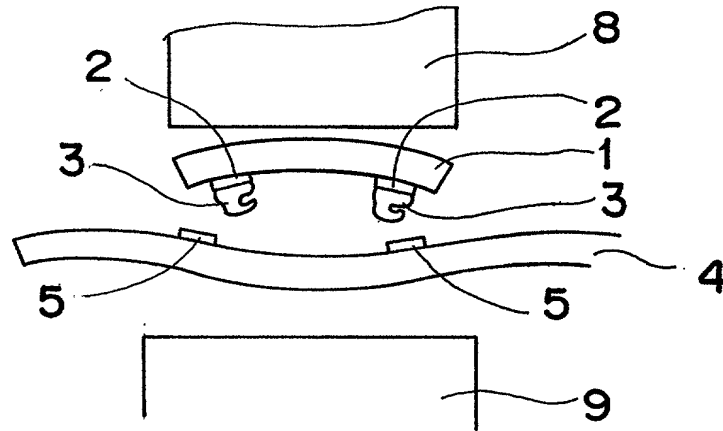


Fig.4B

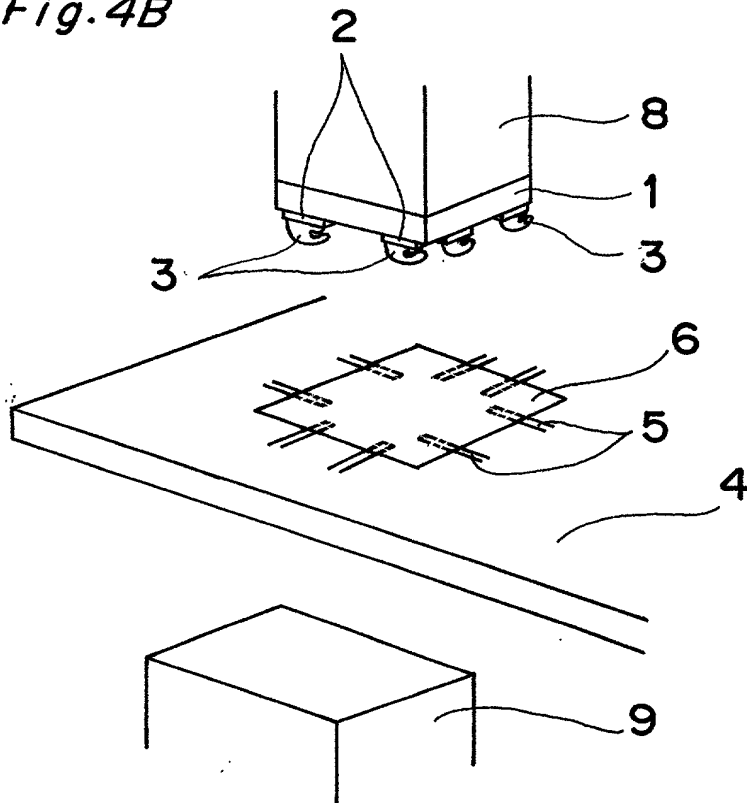
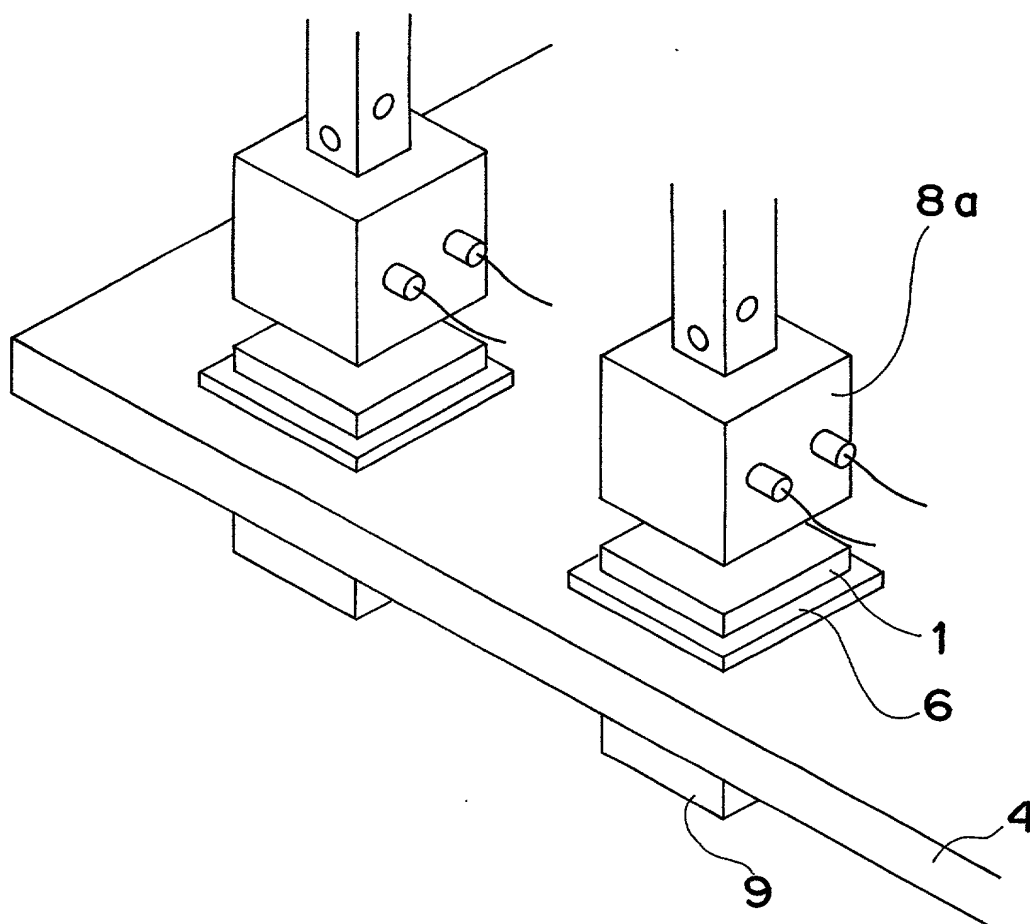


Fig. 4C





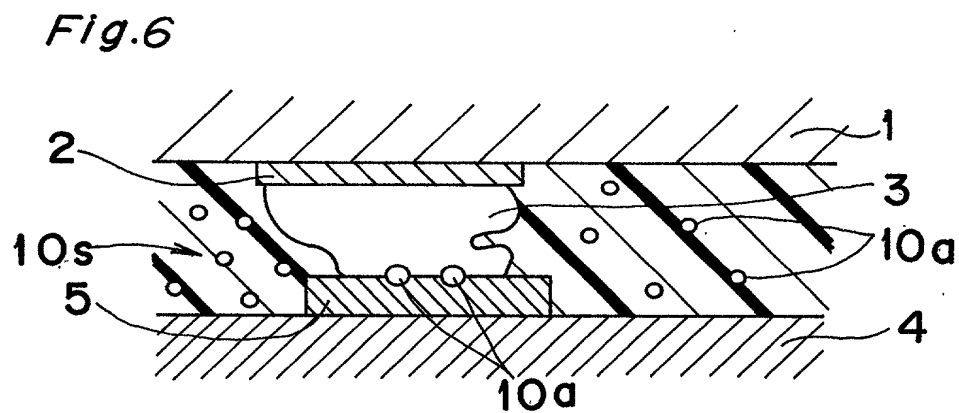
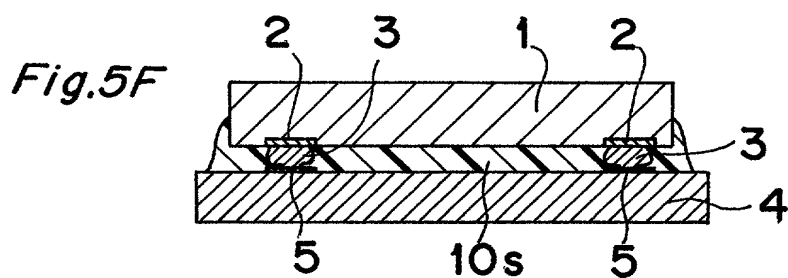
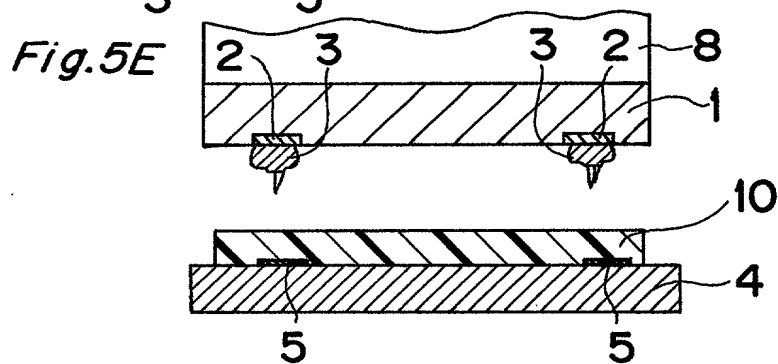
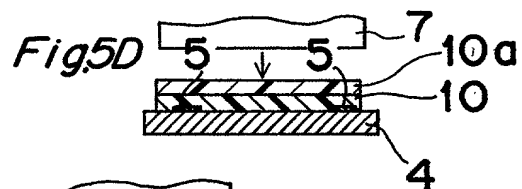
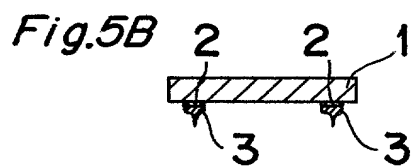




Fig.7A

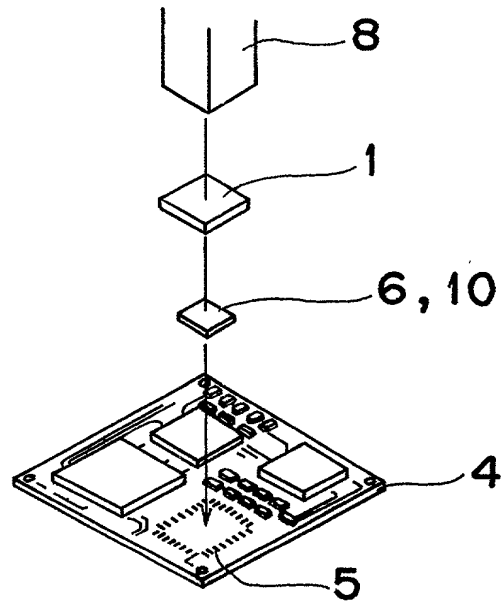


Fig 7B

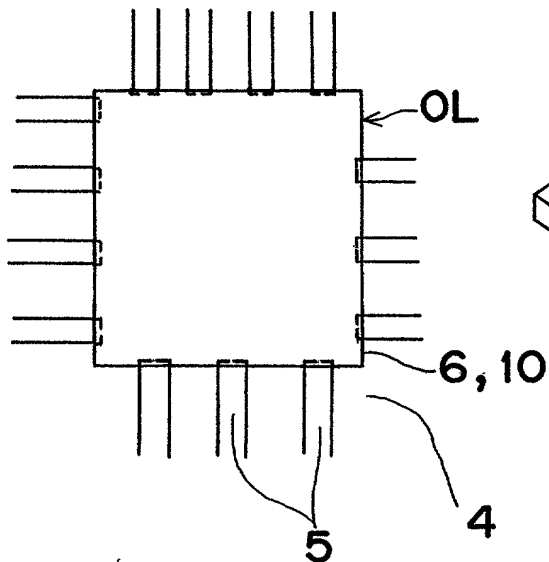


Fig.7C

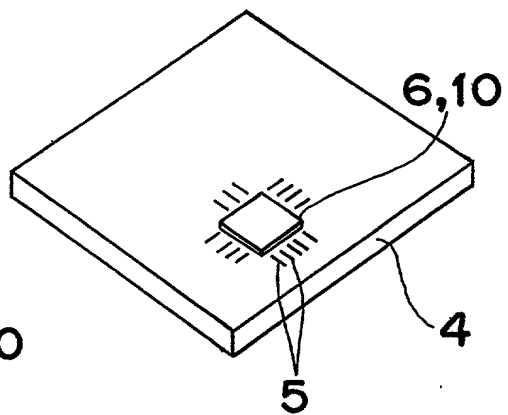


Fig. 8A

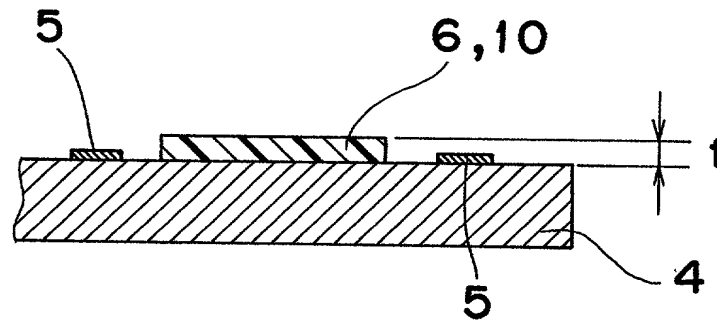


Fig. 8B

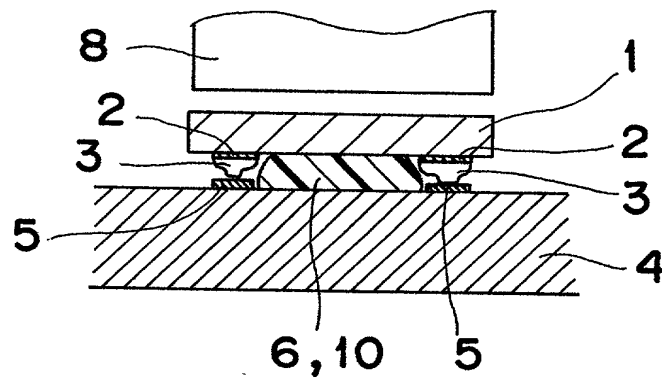


Fig. 8C

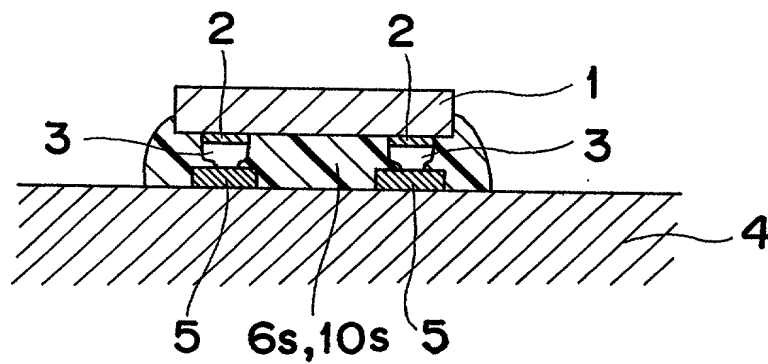


Fig.9A

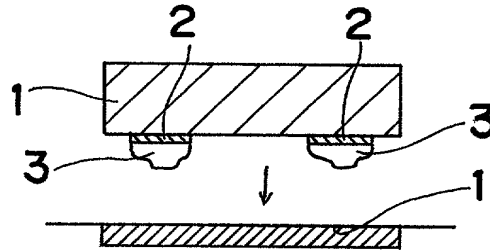


Fig.9B

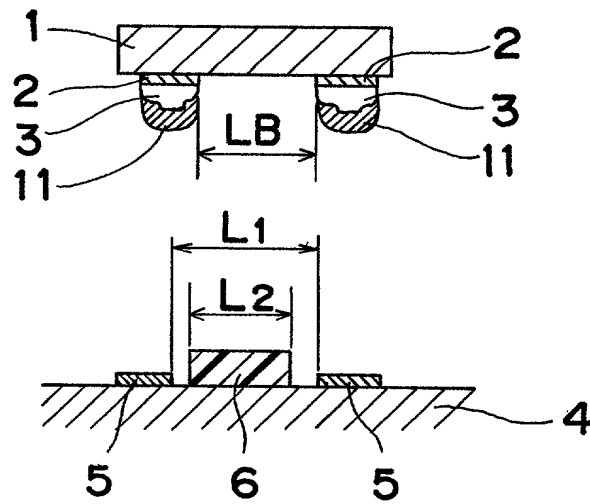
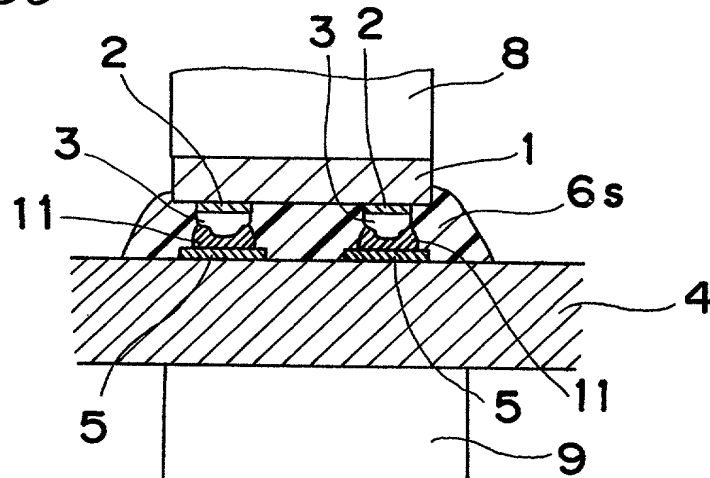


Fig.9C



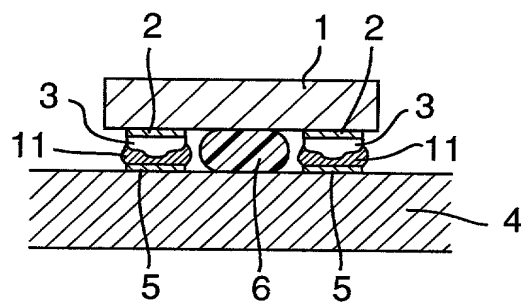
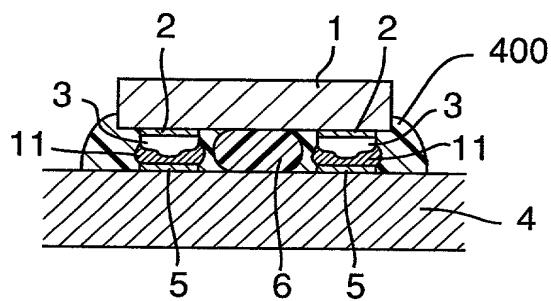
*Fig.9D**Fig.9E*

Fig.10A




Fig.10B




Fig.10C

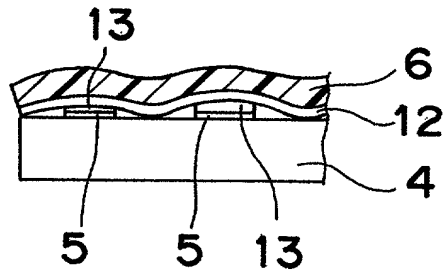


Fig.10D




Fig.10E

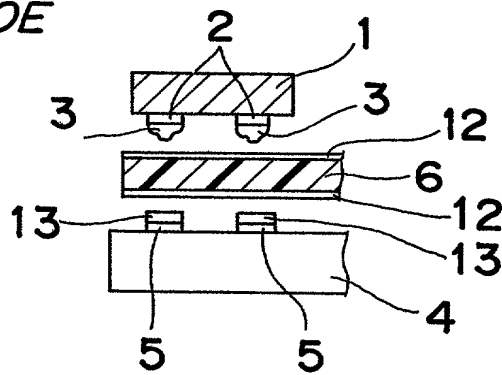


Fig.10F

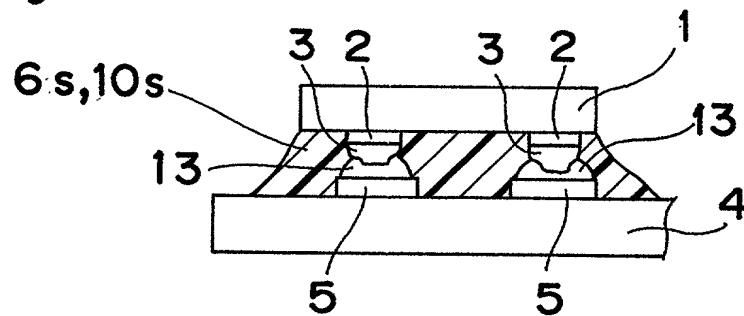


Fig.IIA

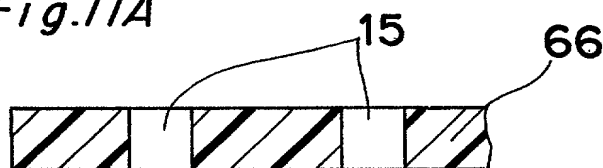


Fig.IIB

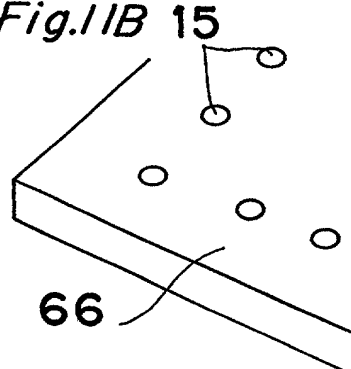


Fig.IIC

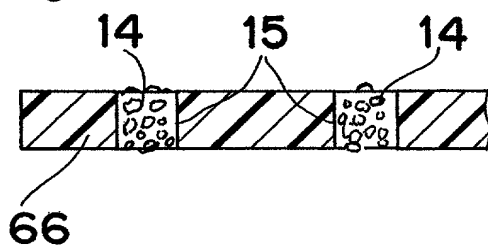


Fig.IID




Fig.IIE

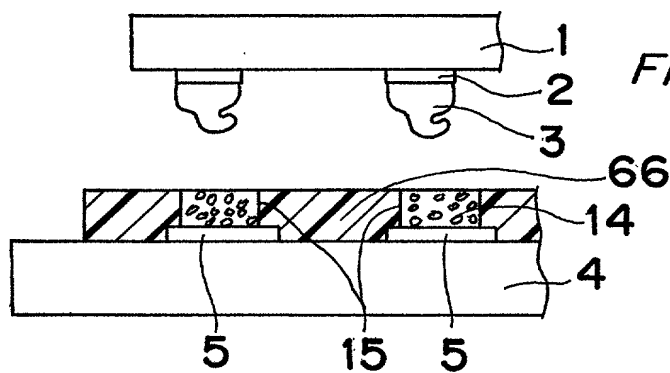


Fig.IIF

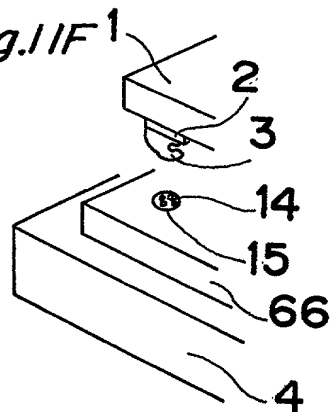


Fig.IIG

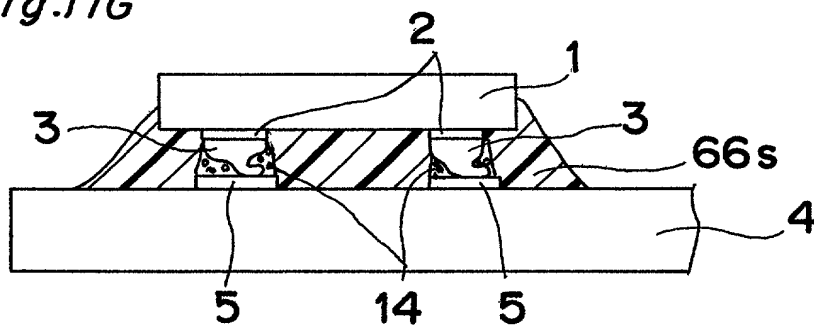


Fig. 12A




Fig. 12E




Fig. 12B

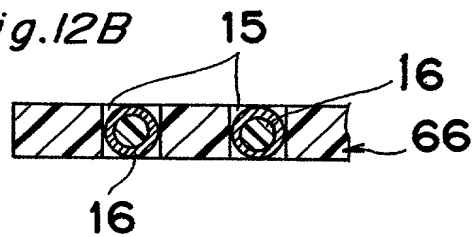


Fig. 12F




Fig. 12C

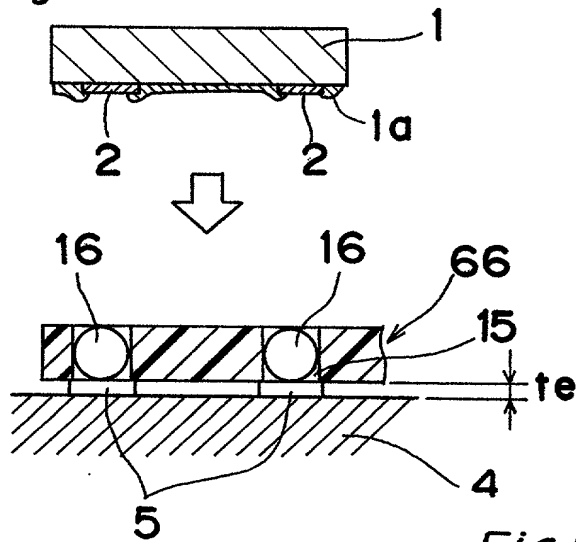


Fig. 12G




Fig. 12D

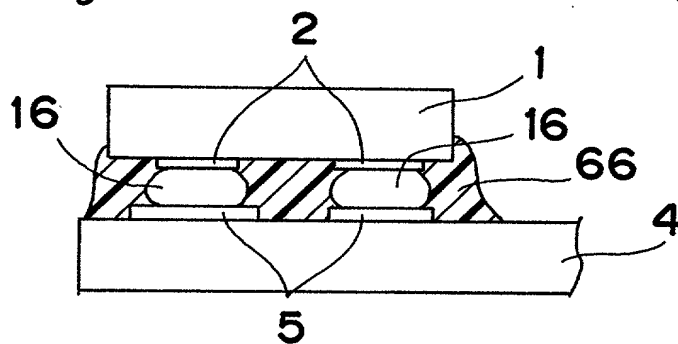


Fig. 12H

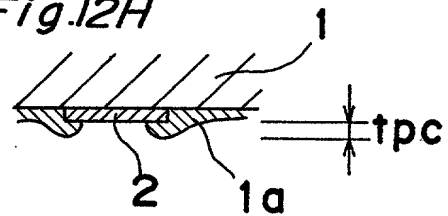




Fig.13

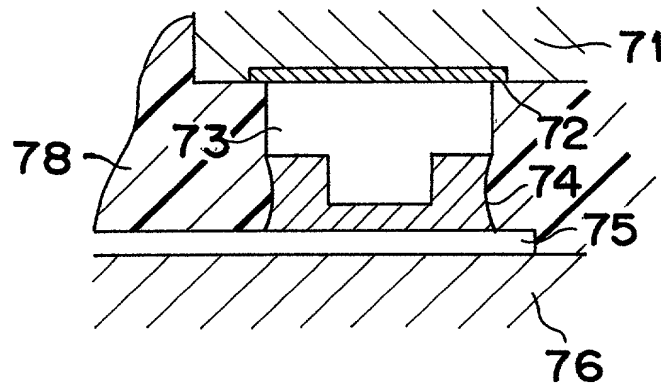


Fig.14A

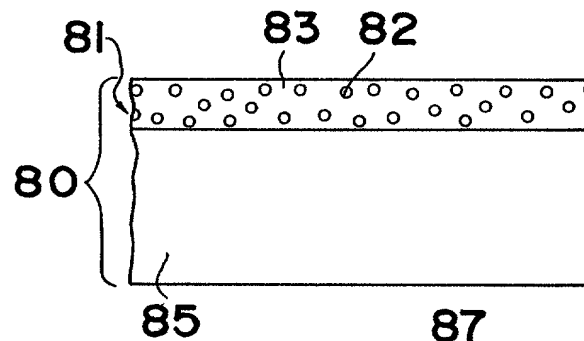


Fig.14B

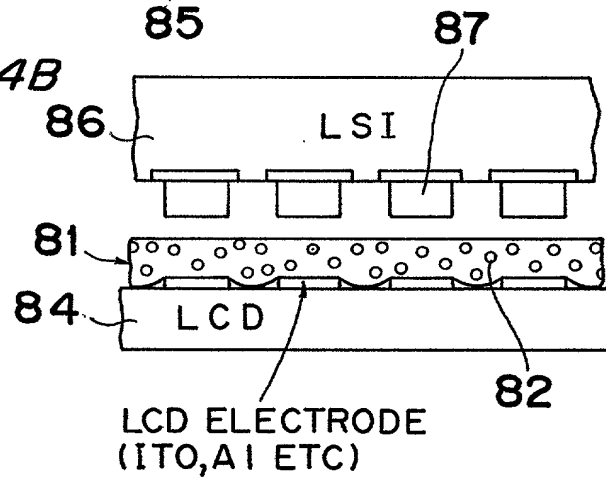


Fig.15A

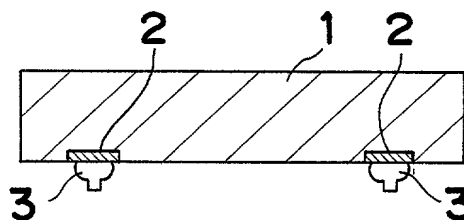


Fig.15B


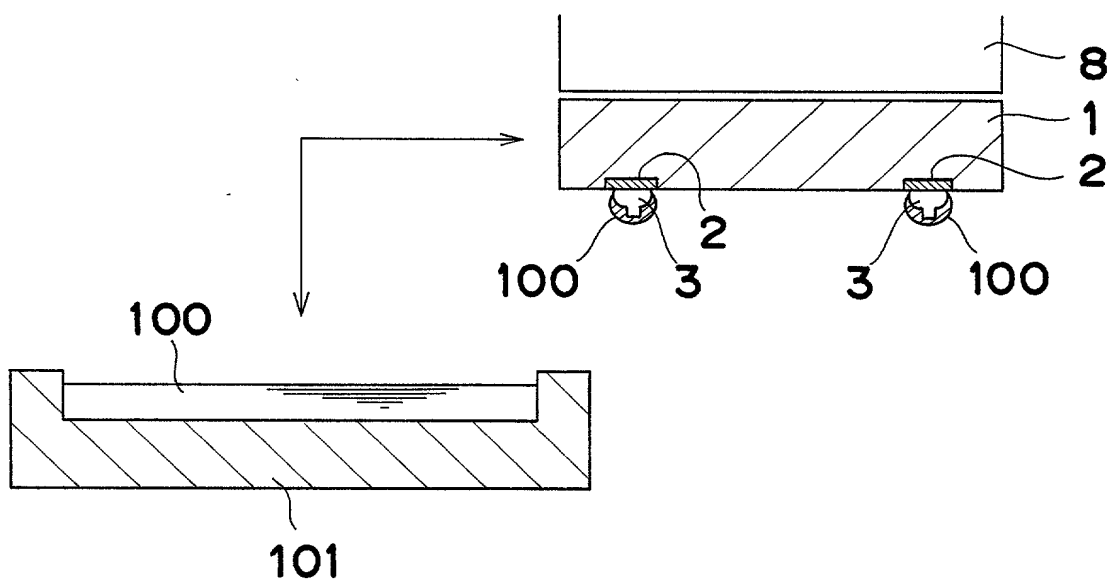


Fig.15C

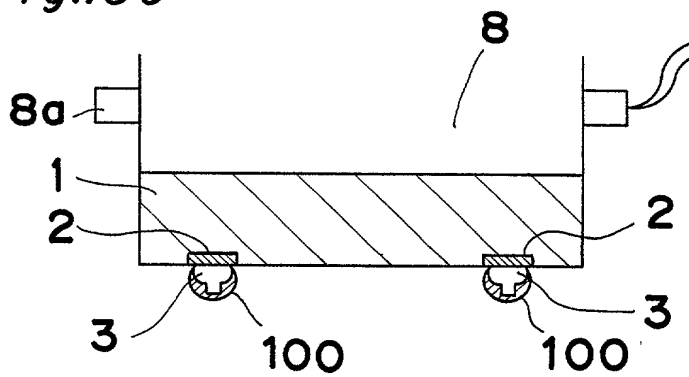

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Declaration and Power of Attorney For Patent Application

### 特許出願宣言書及び委任状

### Japanese Language Declaration

### 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR  
MOUNTING ELECTRONIC COMPONENT  
ON CIRCUIT BOARD

上記発明の明細書（下記の欄でx印がついていない場合は、本表に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を \_\_\_\_\_ とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。

☒ was filed on Dec. 26, 1997  
as United States Application Number or  
PCT International Application Number  
PCT/JP97/04873 and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Page 1 of 3

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

ATTACHMENT C

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

### Prior Foreign Application(s)

外国での先行出願

8-350738

(Number)  
(番号)

Japan

(Country)  
(国名)

(Number)  
(番号)

(Country)  
(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

Dec. 27, 1996

(Day/Month/Year Filed)  
(出願年月日)

☐

(Day/Month/Year Filed)  
(出願年月日)

☐

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

### Japanese Language Declaration (日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の  
手続きを米特許商標局に対して遂行する弁護士または代理人  
として、下記の者を指名いたします。(弁護士、または代理  
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint  
the following attorney(s) and/or agent(s) to prosecute this  
application and transact all business in the Patent and Trademark  
Office connected therewith (list name and registration number)

Michael R. Davis, Reg. No. 25,134, Matthew M. Jacob, Reg. No. 25,154,  
Jeffrey Nolton, Reg. No. 25,408, Warren M. Cheek, Jr., Reg. 33,367,  
Nils E. Pedersen, Reg. No. 33,145, and Charles R. Watts, Reg. 33,142,  
who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P.

寄附送付先

Send Correspondence to:

WENDEROTH, LIND & PONACK L.L.P.  
2033 K Street, N.W., Suite 800  
Washington, D.C. 20006 U.S.A.

直接電話連絡先： (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

WENDEROTH, LIND & PONACK, L.L.P.

Phone: (202) 721-8200

Fax: (202) 721-8250

唯一または第一発明者名

1-00

Full name of sole or first inventor

Kazuto NISHIDA

発明者の署名

日付

Inventor's signature

Date

住所

Residence

国籍

Citizenship

私書箱

Post Office Address

1-1-128, Kouzu, Katano-shi,

OSAKA 576-0053 JAPAN

第二共同発明者

Full name of second joint inventor, if any

第二発明者の署名

日付

Second inventor's signature

Date

住所

Residence

国籍

Citizenship

私書箱

Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をす  
ること)

(Supply similar information and signature for third and subsequent  
joint inventors.)